


I-35E PROJECT (LOWEST STEMMONS)



"Through collaboration and leadership, we deliver a safe, reliable, and integrated transportation system that enables the movement of people and goods."

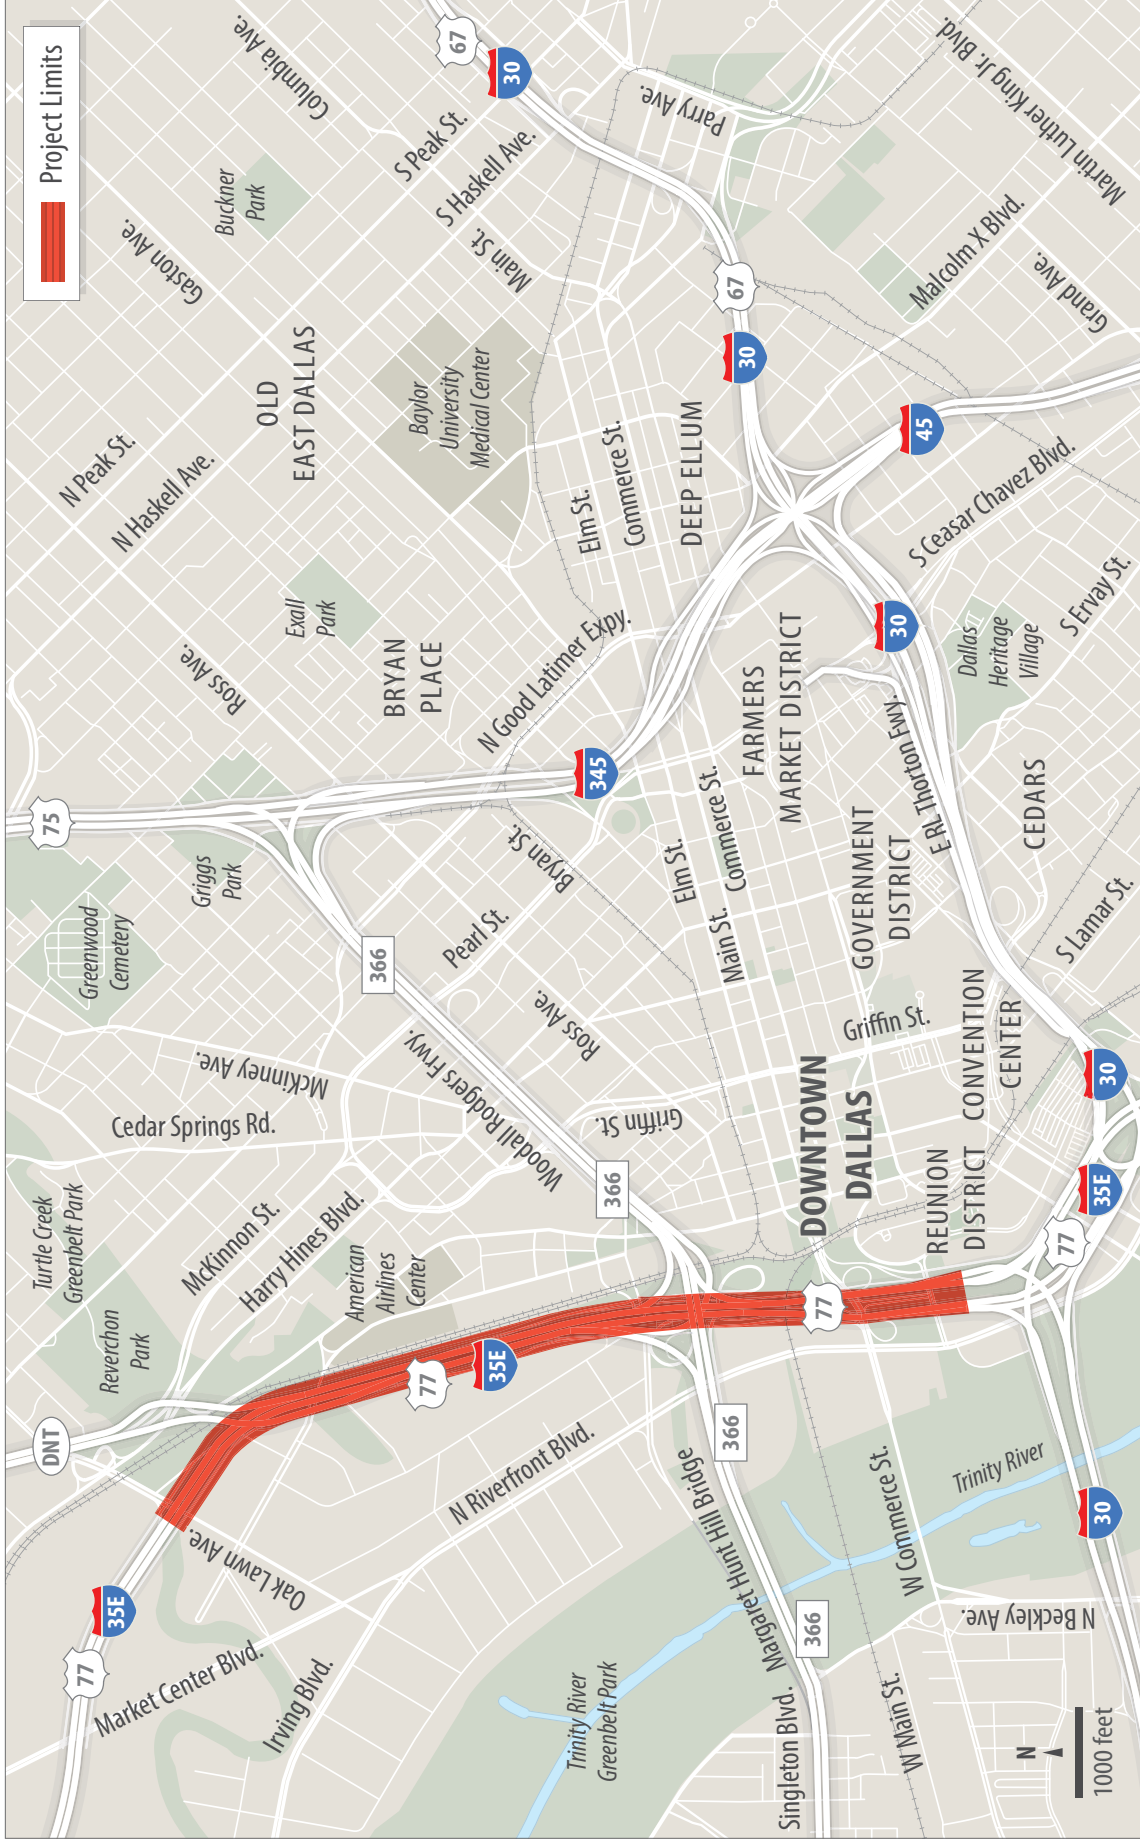

NOTE: Highlighted areas are not drawn to exact scale. TXDOT graphic

PURPOSE AND NEED

Lowest Stemmons project is a break-out project from Project Pegasus. The goal of the Lowest Stemmons project is to leverage existing funding to provide interim operational improvements to the congested I-35E corridor. The project will tie-in with the Horseshoe project to the south and will be constructed inside the ultimate Project Pegasus Right-of-Way.

PROJECT DETAILS

Limits: I-35E: I-30 to N of Oak Lawn Ave. in Dallas Co.

CSJs: 0196-03-268

Description: Interim operational improvements consisting of collector-distributor roads (north and south-bound), direct connectors, and reconstructed ramps and bridge structures as necessary to accommodate the interim improvements.

Total Length: 2.3 miles

PROJECT STATUS

- Public meeting held in summer 2016
- Environmental clearance was received in May 2017
- Construction scheduled to begin fall 2017
- Construction completion estimated for early 2020


ESTIMATED COSTS

Estimated Construction Cost	\$79 M
Estimated Utility Relocations Cost	\$7 M
Estimated Design/QA/QC Cost	\$5 M
TOTAL ESTIMATED COST	\$91 M

ESTIMATED FUNDING

Congestion Relief	\$79 M
Strategy 102	\$7 M
Strategy 111	\$5 M
TOTAL ESTIMATED FUNDING	\$91 M


PROJECT TIMELINE

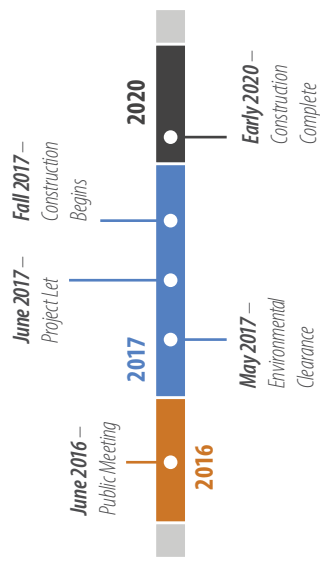

SOURCE: TXDOT


TXDOT graphic

EXISTING TYPICAL SECTION

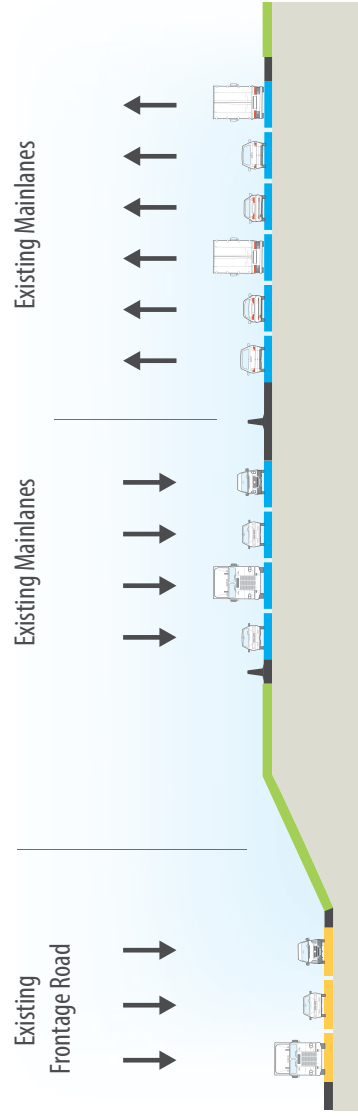

SOURCE: Texas Department of Transportation.

PROPOSED TYPICAL SECTION

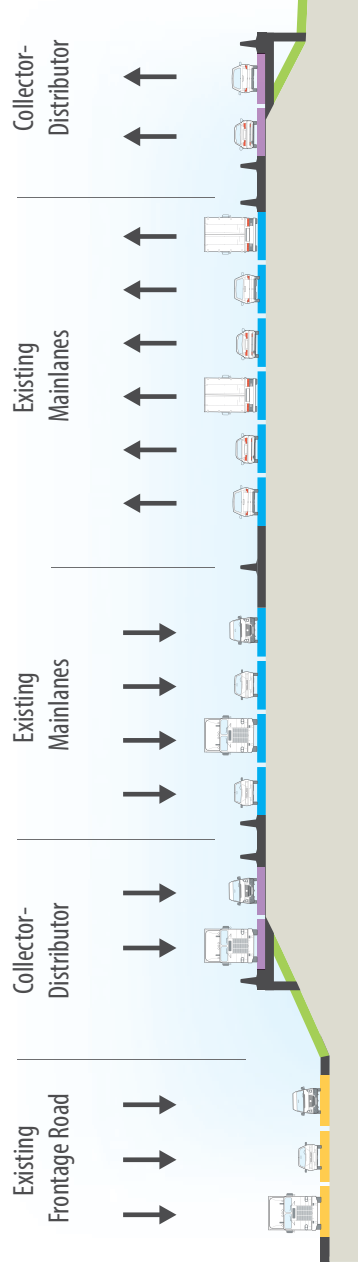

TXDOT graphic

CONTACT INFORMATION

Amanda Moser, P.E.
 TXDOT Dallas Construction Transportation Engineer
 (214) 319-6583
 Amanda.Moser@txdot.gov

Dallas District Office
 4777 E. Highway 80
 Mesquite, TX 75150



Jason Mashell, P.E.
 TXDOT Dallas Dallas County Area Engineer
 (214) 320-4446
 Jason.Mashell@txdot.gov



#txclearlanes

Website: www.TexasClearLanes.com