



The Texas Department of Transportation - Texas A&M Transportation Institute Sedimentation and Erosion Control (SEC) Laboratory

INTRODUCTION:

Starting with the 1993 edition of the Texas Department of Transportation (TxDOT) *Standard Specifications for Construction of Highways, Streets and Bridges*, TxDOT shifted from a material-type specification into an “approved product”-type specification for two classifications of erosion control and revegetation products. These two product classifications included rolled and spray-on products promoted by industry for either slope protection or flexible channel liner applications, (termed “Soil Retention Blankets within TxDOT’s Standard Specification Item 169), and standard hydraulic mulches (termed “cellulose fiber mulch” within TxDOT’s Standard Construction Item 164).

TxDOT’s current specifications for soil retention blankets and for cellulose fiber mulches are included as attachments to this document, and do not include any of the typical ASTM-type material requirements such as mass per unit area, water holding capacity, tensile strength, elongation, pH, etc. TxDOT has elected to base their approved product list (APL) upon the documented field performance of the products through a formal evaluation program conducted by the Environmental and Planning Program of the Texas Transportation Institute (TTI).

TxDOT has defined the critical performance factors for the products, and has established minimum performance standards which must be met for any product seeking to be approved for use within any of TxDOT’s construction or maintenance activities.

With respect to the rolled and spray on products being promoted by industry for slope protection and flexible channel liner protection, TxDOT adopted the following critical performance factors:

- How well the product protected the seedbed of an embankment or a drainage channel from the loss of sediment during simulated rainfall or channel flow events; and
- How well the product promoted the establishment of warm-season, perennial vegetation.

Furthermore, TxDOT recognized that the above rolled and spray-on products are promoted by industry within two general use classifications including:

- Products designed for overland flows associated with typical slope or embankment protection applications (termed “Class 1” applications within TxDOT’s Standard Specification Item 169), and
- Products designed for concentrated water flows associated with typical highway drainage channels (termed “Class 2” applications within TxDOT’s Standard Specification Item 169).

By statistically analyzing the performance data produced through controlled performance tests, TxDOT is able to maintain discrete minimum performance standards for each classification of products evaluated at the TxDOT/TTI Sediment and Erosion Control Laboratory (SEC Lab). TxDOT reserves the right to revise the minimum performance standards as it deems necessary. In order for a product to be placed upon TxDOT’s APL, the product must meet (or exceed) all adopted minimum performance standards for that application. Failure to meet any of the adopted minimum performance standards will automatically reject the product from being placed on the APL.

In 2014, TxDOT decided to change the minimum performance standards on erosion products in order to guarantee better performing products on construction and maintenance projects. With recent and potential upcoming changes in the regulatory environment, dealing with erosion and sediment control on construction and maintenance projects, TxDOT’s Maintenance Division is committed to maintaining the Approved Products List with the highest quality best management practices (BMPs) available to us. With increased environmental regulations, TxDOT has to ensure the best products are being implemented on projects to minimize

environmental concerns and reduce the risk for product failure. The new performance standards have been developed from years of product evaluation and ongoing changes to environmental regulations.

Effective February 2015, products will have to have met (or exceed) the new performance threshold in order to remain or be placed on the Approved Products List (APL). Products that fail to meet any of the new performance standards will be removed from the APL. The product representative is provided the opportunity of retesting the identical product with the Texas Transportation Institute (TTI) Sediment and Erosion Control Laboratory (SEC Lab).

Also, starting with the 2014 edition of the Texas Department of Transportation (TxDOT) *Standard Specifications for Construction of Highways, Streets and Bridges*, erosion and sediment control devices must be selected from the *Erosion Control Approved Products* or *Sediment Control Approved Products* lists. Sedimentation and environmental control measures must be installed and maintained to prevent or reduce the discharge of pollutants in accordance with the Storm Water Pollution Prevention Plan (SWP3) on the plans and the Texas Pollutant Discharge Elimination System (TPDES) General Permit TXR150000.

A review of the TxDOT testing program was conducted in 2000 in order to reduce the annual operating costs of the facility. Likewise, there was a desire to make the testing program more flexible so that the program can provide a better service to other agencies that have expressed interest in the potential for a cooperative program of testing and research

THE TESTING FACILITY:

About the SEC Lab


The Texas A&M Transportation Institute's Sediment and Erosion Control Laboratory (SEC Lab) provides the transportation industry with a research and performance evaluation program for roadside environmental management. The program includes storm water quality improvement, erosion and sediment control, and vegetation establishment and management.

TTI's Environment and Planning Program operates this 19-acre, full scale, indoor/outdoor facility. Demand for the facility has steadily grown for over 20 years, necessitating the recent expansion to meet the industry's research needs. With funding from the Texas Department of Transportation (TxDOT), TTI produces and maintains the TxDOT Approved Products List (APL) for all sediment and erosion control products used by TxDOT on Texas roadsides. Three major aspects of the lab are the indoor rain simulators, sediment retention device flume, and variable slope channel flume. In addition to this equipment, the SEC Lab also houses a 2,800-square-foot climate-controlled greenhouse, small footprint stormwater quality structure, index testing laboratory, bench-scale testing capabilities, 65-foot concrete flume, 1,000 linear feet of 25-foot tall soil embankment built with 2:1 and 3:1 slopes per highway specifications, and 10 at-grade channels 85-feet in length.

The new facility was constructed to meet program objectives and a new testing protocol has been put in place. The facility includes a building with two runoff beds and rainfall simulator to evaluate soil protection products. An outdoor flume is used to evaluate channel liner products. Two greenhouses will be used to establish vegetation in trays and flumes before and during the testing cycle on a year-a-round basis. The facility was constructed by the Environmental and Planning Program of The Texas A&M Transportation Institute on Texas A&M University's Riverside Campus, located 6.5 km (4 miles) west of Bryan, Texas.



Slope Protection Facility

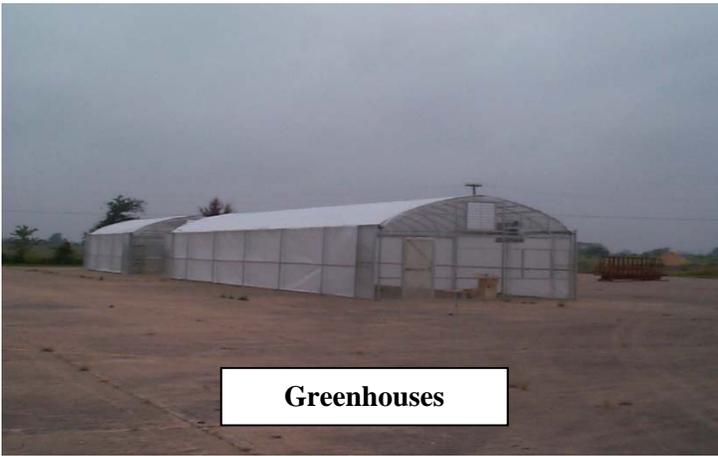

The greenhouses at the facility allow vegetation to be grown on a year-round basis. The greenhouse contains the nursery flats covered with the selected slope protection products to determine their effect on establishing perennial vegetation cover and trays to grow vegetation in the flumes covered with selected channel liners prior to flow simulation.

2013 LAB EXPANSION

To expedite product and device performance evaluations and to enable additional research and development, the SEC Lab was recently expanded. The expansion included a new rainfall simulator building that houses three 8-foot by 40-foot variable slope soil fill test beds that accommodate any slope up to 2:1 (50%).



The new facility will continue producing the water drop size distribution and impact velocity typically used as part of the TxDOT APL performance evaluation protocol. However, the new facility design includes new testing capabilities to ensure compliance with ASTM standard test methods. This new rainfall simulator facility opened on September 4, 2013 and a calibration period followed. Testing under the new protocol is scheduled for fall 2013. Adjacent to the new rainfall simulator building is a 1,500-foot covered sediment bed preparation area. This area creates a dry work space for storage of the new larger test beds during inclement weather. The expansion also includes a 40-foot by 60-foot soil storage building that allows for test bed preparation during rain events without affecting antecedent soil moisture, a critical factor in the indoor testing procedure. The existing rainfall building was also being modified to expedite testing. The building was originally designed for manual sediment collection. In fall 2012, the existing sediment collection pits were expanded to enable the use of larger collection devices to reduce the amount of testing time required. To handle the larger loads, a 4-ton overhead bridge crane also was installed.

THE INDUSTRY ADVISORY COUNCIL

The Pooled Fund Advisory Committee recognized a need for a venue through which industry could make comments and suggestions regarding the evaluation program. The Industry Advisory Council (IAC) was formed to encourage dialogue between industry, participants, related associations and the Committee. IAC members call meetings at their convenience to discuss matters appropriate to the conduct of the Laboratory. Management and staff will be available to meet with the IAC to discuss and provide answers to questions or concerns raised by the IAC. Although the committee will remain sensitive to all matters voiced by the IAC, the final decision and authority regarding the conduct of the facility remains with the Pooled Fund Advisory Committee.

INITIAL EVALUATION FEES

Effective with all products evaluated within the 2001 evaluation cycle and beyond, initial evaluation fees shall be required of each product evaluated at the TxDOT/TTI Sediment and Erosion Control (SEC) Laboratory. These fees shall be above and beyond any fees as necessary for TTI to provide for the installation of the products.

The initial evaluation fee schedule shall be as follows:

- Class 1 "Slope Protection" Applications: \$7,500 per evaluation set
- Class 2 "Flexible Channel Liner" Applications: \$7,500 per individual channel
- "Hydraulic Mulch" Applications: \$7,500 per evaluation set
- Sediment Retention Device \$7,500 per evaluation set

An "evaluation set" is defined as two individual evaluation plots – either a 3:1 clay and a 3:1 sand set, or a 2:1 clay and a 2:1 sand set.

Should initial evaluation fees not be received within TTI by the deadline established, the product will be removed from the evaluation waiting list schedule, and the evaluation slot offered to the next product in accordance with the existing procedures relating to the waiting list. The product must then submit a new "Request for Performance Evaluation" packet in order to place the product back on the waiting list for evaluation.

Services Request

The form for "Request for Testing Services" can be found here:

<https://static.tti.tamu.edu/tti.tamu.edu/documents/SECL/application-for-testing.pdf>

RECERTIFICATION FEES & LABORATORY REPORT OPTIONS

The intent of the recertification program is to insure quality control of products once approved, and insure that no significant revisions have been made to the product's material characteristics, trade name, private label list, official contact representative, etc.

Recertification Schedule:

Recertification fees and laboratory reports shall be required of each product on TxDOT's Approved Product List (APL) as follows:

Class 1 “Slope Protection” Application Products:

| If the Product was Originally Approved for Class 1 Applications During an Evaluation Cycle Ending In . . . | Then Initial Recertification / Recording Fees and Laboratory Reports are Due by the Last Working Day of November, of . . . | And Subsequent Recertification Recording Fees and Laboratory Reports are Due by the Last Working Day of November of . . . |
|---|---|--|
| 2003 | 2006 | 2010,2013,2016,2019,etc. |
| 2004 | 2007 | 2011,2014,2017,2020,etc. |
| 2005 | 2008 | 2012,2015,2018,2021,etc. |
| 2006 | 2009 | 2013,2016,2019,2022,etc. |
| 2007 | 2010 | 2014,2017,2020,2023,etc. |
| 2008 | 2011 | 2015,2018,2021,2024,etc. |
| 2009 | 2012 | 2016,2019,2022,2025,etc. |
| 2010 | 2013 | 2017,2020,2023,2026,etc. |
| 2011 | 2014 | 2018,2021,2024,2027,etc. |
| 2012 | 2015 | 2019,2022,2025,2028,etc. |
| 2013 | 2016 | 2020,2023,2026,2029,etc. |
| 2014 | 2017 | 2021,2024,2027,2030,etc. |
| 2015 | 2018 | 2022,2025,2028,2031,etc. |
| 2016 | 2019 | 2023,2026,2029,2032,etc. |
| 2017 | 2020 | 2024,2027,2030,2033,etc. |
| 2018 | 2021 | 2025,2028,2031,2034,etc. |

Class 2 “Flexible Channel Liner” Application Products:

| If the Product was Originally Approved for Class 2 Applications During an Evaluation Cycle Ending In . . . | Then Initial Recertification / Recording Fees and Laboratory Reports are Due by the Last Working Day of November, of . . . | And Subsequent Recertification Recording Fees and Laboratory Reports are Due by the Last Working Day of November of . . . |
|---|---|--|
| 2002 | 2005 | 2009,2012,2015,2018,etc. |
| 2003 | 2006 | 2010,2013,2016,2019,etc. |
| 2004 | 2007 | 2011,2014,2017,2020,etc. |
| 2005 | 2008 | 2012,2015,2018,2021,etc. |
| 2006 | 2009 | 2013,2016,2019,2022,etc. |
| 2007 | 2010 | 2014,2017,2020,2023,etc. |
| 2008 | 2011 | 2015,2018,2021,2024,etc. |
| 2009 | 2012 | 2016,2019,2022,2025,etc. |
| 2010 | 2013 | 2017,2020,2023,2026,etc. |
| 2011 | 2014 | 2018,2021,2024,2027,etc. |
| 2012 | 2015 | 2019,2022,2025,2028,etc. |
| 2013 | 2016 | 2020,2023,2026,2029,etc. |
| 2014 | 2017 | 2021,2024,2027,2030,etc. |
| 2015 | 2018 | 2022,2025,2028,2031,etc. |
| 2016 | 2019 | 2023,2026,2029,2032,etc. |
| 2017 | 2020 | 2024,2027,2030,2033,etc. |
| 2018 | 2021 | 2025,2028,2031,2034,etc. |

RECERTIFICATION FEES & LABORATORY REPORT OPTIONS (cont.)

“Cellulose Fiber Mulch” Application Products:

| If the Product was Originally Approved for Mulch Applications During an Evaluation Cycle Ending In . . . | Then Initial Recertification / Recording Fees and Laboratory Reports are Due by the Last Working Day of November, of . . . | And Subsequent Recertification Recording Fees and Laboratory Reports are Due by the Last Working Day of November of . . . |
|---|---|--|
| 2002 | 2005 | 2009,2012,2015,2018,etc. |
| 2003 | 2006 | 2010,2013,2016,2019,etc. |
| 2004 | 2007 | 2011,2014,2017,2020,etc. |
| 2005 | 2008 | 2012,2015,2018,2021,etc. |
| 2006 | 2009 | 2013,2016,2019,2022,etc. |
| 2007 | 2010 | 2014,2017,2020,2023,etc. |
| 2008 | 2011 | 2015,2018,2021,2024,etc. |
| 2009 | 2012 | 2016,2019,2022,2025,etc. |
| 2010 | 2013 | 2017,2020,2023,2026,etc. |
| 2011 | 2014 | 2018,2021,2024,2027,etc. |
| 2012 | 2015 | 2019,2022,2025,2028,etc. |
| 2013 | 2016 | 2020,2023,2026,2029,etc. |
| 2014 | 2017 | 2021,2024,2027,2030,etc. |
| 2015 | 2018 | 2022,2025,2028,2031,etc. |
| 2016 | 2019 | 2023,2026,2029,2032,etc. |
| 2017 | 2020 | 2024,2027,2030,2033,etc. |
| 2018 | 2021 | 2025,2028,2031,2034,etc. |

Recertification Fees and Options:

Manufacturers of products on TxDOT’s APL have the following options regarding recertification of their products:

| Option | Procedures | Type of Product | Fee |
|---------------|--|------------------------|------------|
| 1 | Manufacturer has required physical property tests performed by an independent, accredited laboratory of their choice. Tests shall have been performed within a three-month period prior to the submission for recertification. Laboratories must be accredited by either the Geosynthetic Accreditation Institute, Laboratory Accreditation Program (GAI-LAP), or the American Association for Laboratory Accreditation (A2LA) | Class 1 | \$100 |
| | | Class 2 | \$100 |
| | | Cellulose Fiber Mulch | \$100 |
| 2 | Manufacturer submits a physical sample of product of product to the Texas Transportation Institute who will perform the appropriate physical property tests. | Rolled Class 1 or 2 | \$650 |
| | | Spray-On Class 1 | \$250 |
| | | Cellulose Fiber Mulch | \$250 |

EVALUATION WAITING LIST:

Given the limited number of individual evaluation plots or channels, and given the numbers of products being developed and marketed by industry, it was necessary to implement a waiting-list procedure to provide the greatest degree of access to the facility to the greatest number of participants. The Laboratory Manager is required to maintain a waiting list of those products that desire to be evaluated during the next available test cycle. The final decision confirming whether a product will be tested at the Laboratory rests with the Laboratory Manager.

The waiting list shall be maintained based upon the postmarked date on an acceptable, complete "Request for Performance Evaluation" (RPE) as received within TTI. Personal memoranda, telephone calls, fax transmissions or individual letters to the Lab Manager will not be utilized to determine a product(s) position on the waiting list. Based upon space availability, the Laboratory Manager will offer an evaluation slot of the gradient and soil type requested by the participant for Slope Protection applications, or for the centerline gradient requested by Flexible Channel Liner participants, based upon the order of the postmarked date on the completed RPE. In the event a participant fails to commit to testing by the deadline established by TTI, the product will be removed from the waiting list and the evaluation slot offered to the next participant on the waiting list.

Management reserves the right to limit the number of products any single company, manufacturer or distributor may evaluate during any given evaluation cycle, and will treat requests for different gradients, soil types and/or channel gradients as separate requests.

INSTALLATION & EVALUATION PROCEDURES:

With respect to products being promoted for "Slope Protection" applications, participants must select the steepness of slope on which their product is to be evaluated. Participants have the option of having their product(s) evaluated on the 3:1 slopes only, the 2:1 slopes only, or on both 3:1 and 2:1 slopes.

With respect to products being tested for "Flexible Channel Liner" applications, participants have the option of specifying the shear-stress range most appropriate for their product. Generally, the 3% centerline-gradient channels are utilized to evaluate products designed for shear stresses up to 383 pascals (8 pounds per square foot).

All products, whether submitted for "Slope Protection" or for "Flexible Channel Liners" applications, are installed in strict accordance with the manufacturer's published installation literature, as determined by the Laboratory Manager. Particular attention will be paid to edge and junction overlaps, staple size and staple pattern. Installation techniques which, in the Laboratory Manager's opinion, are not supported by the product's published installation literature will not be permitted. The adopted installation techniques, as taken from the product's published installation literature and as agreed on between the participant and Laboratory Manager, may be utilized by TxDOT to produce "Standard Installation Sheets" for the approved products as may be appropriate.

Currently, all hydraulic mulches are applied at the following rates only:

- Sandy Soils - 2.8 Mg/ha (2,500 lbs/ac); or
- Clay Soils - 2.3 Mg/ha (2,000 lbs/ac).

To be approved for use by TxDOT, a material must demonstrate the ability to foster the development of an acceptable vegetation cover and demonstrate that it can reduce the sediment loss to an acceptable level compared to an unprotected surface.

Each nursery flat and channel flume receive the identical rate of the standard, rural area, warm season, permanent, perennial seed mix as specified for TxDOT's Bryan District 17. Further, each flat and channel flume receive the same amount of fertilizer and simulated rainfall.

CLASS I – SLOPE PROTECTION

The procedure for testing Class 1 slope protection materials utilizes two slopes, 1:3 and 1:2 and two soil types, sand and clay. At the participants' option, a material may be tested on 1:3, 1:2 or both. Regardless of slope, the material is tested on both sand and clay. Materials are evaluated for sediment loss from three different storm intensities. Vegetation cover is determined by taking video samples which are processed to determine the average surface cover of vegetation.

Sediment loss is measured independently of vegetation. Removing the vegetation from the test provides a better measure of a materials ability to protect the soil surface and prevent down hill migration of sediment and seed. The same soil for the sediment test will be used for the vegetation cover test. Soil (sand and clay) will be sterilized using steam. Soil is placed on steam pipes laid on a concrete base. Soil will be covered and raised to a temperature of 140°F (60°C) for 6 hours. They are placed in the test beds and nursery flats within 48 hours of treatment.

Test Beds

Test beds for sediment control tests are 30 ft. x 5 ft. x 0.7 ft. deep. Frames are steel and plywood with porous bottoms. A layer of filter fabric will control loss of material from the beds over the bottom grid.

Soils used in the tests are of two types, a loamy sand and a plastic clay. The soils are collected from on site sources, graded for texture, composition and organic content to insure uniformity. Soil moisture is controlled for all tests.

Once the soils have been stabilized in the test beds the slope protection material is applied according to manufacturer's literature.



Sediment Collection and Processing



All water and sediment is collected in a tank at the base of the sediment beds. The sediment is allowed to settle for a minimum of 12 hours. At that point the clear water will be drawn off. The remaining sediment and water is removed from the sediment tank and weighed. Weight is taken to the nearest 0.1 lb. Sediment is then agitated for two minutes and 10 samples are taken. Agitation continues until all samples are taken. Samples are transferred to a desiccating oven and dried at 130°F (58°) for 24 hours. Samples are then weighed on a scientific balance to the nearest 0.0004 oz.



Sediment loss is calculated by determining the water (*w*) to sediment (*s*) ratio (*w/s*) of the sediment samples by dividing the dry sample weight by the original sample weight. This ratio is applied to the full sediment sample to determine total sediment loss.

Rainfall Simulation

Rainfall simulation is done using a new simulator that more closely reproduces the more damaging precipitation drop sizes found in more intense storms. Uniformity of the coverage and precipitation rate is carefully controlled. Each test consists of three (3), repetitions of three, 30-minute storms of 3.5 in/hr. After each set of 3 rainfall events, the test bed is completely rebuilt with new soil and new Class 1 material.

Vegetation Cover

Vegetation cover is based on the average percent of surface cover achieved in three standard nursery flats (12 in x 18 in) covered with the selected Class 1 material. Flats are seeded with the seeding mixture, placed on 3:1 and 2:1 racks and allowed to grow for 30 days. Percent vegetation covered is determined using a digital camera and processed using the current VCAP technology.



CLASS II – FLEXIBLE CHANNEL LINERS

The procedure for testing Class II flexible channel liner material utilizes vegetated trays 30 ft long x 1.5 ft wide x 4.0 ft deep which are placed in a flume prior to the simulated flow event. The flume slope can be adjusted from 0% to 12%. A material may be tested on a 7% or 3% slope depending on the manufacturers' estimate of the materials working strength. Shear stress flows beginning at the 96 pascal (2 lb./sq. ft.) level and continuing on a 48 pascal (1 lb./sq. ft.) increments up to 383 pascal (8 lbs./sq. ft.).

Test Channel

Three test trays are prepared for each material to be tested. Trays are lined with a filter fabric and then filled with sterile soil. They are seeded manually and the channel liner is installed. Materials are fastened at the top and bottom in accordance with the manufacturer's published literature. Once prepared, the trays are watered and placed in the greenhouse for the initial 30 day resting period. During the rest period water is provided at the rate of 0.75 inch per week.




Flow Simulation

Flow simulation begins after the 30-day rest period. A tray is placed in the flume and brought to 75% field capacity. Test flows will then be run for 20 minutes. Two flows will be run on each tray successively at depths of 1 foot. After each increment of 1 foot, the material is allowed to rest for a minimum of 48 hours and the test repeated at the next stress. Test is continue in this manner until the material fails or survives a stress of >8 psf.

Sediment Data Collection

After each run, profiles are taken longitudinally. Two profiles 3 in from each side of the flume and the third along the centerline on 6 in increments are taken down the flume. This is accomplished with a computer operated instrument and the data is automatically recorded in a computer.

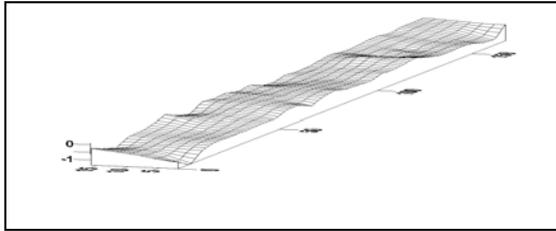

Sediment movement is taken as a gross measure of sediment deposited and lost. A second calculation of sediment loss is made using the average end area method from the longitudinal profiles.

Vegetation Cover

Vegetation cover remains a consideration in channel liner performance. In a channel the material relies to some degree on having some vegetation to help stabilize the blanket. Therefore, it is important that the material protect the seed bed and protect the young plants until the channel is stabilized.

At the end of the 30 day growing period, trays are checked for any foreign vegetation that could indicate that the product was contaminated with weed seed. If no weeds are present, trays are placed on a camera stand and photographed. The photographs are processed using the VCAP program to determine the percent of cover achieved. The data reported are the arithmetic average of surface cover for the three sample trays for each soil type.

HYDRAULIC MULCHES

Cellulose and Bonded Fiber Mulches can be tested for sediment loss and vegetation growth using the same criteria as Class I slope protection for 3:1 and 2:1 clay and sand soils or they can be tested on 4:1 clay and sand soil to be listed in the Hydraulic Mulch category.

Test Beds

Soils used in the tests are of two types, a loamy sand and a plastic clay. The soils are collected from on site sources, graded for texture composition and organic content to insure uniformity. All soils are sterilized by steam. Soil moisture is controlled for all tests.

Once the soils have been stabilized in the test beds the “cellulose fiber mulch” is applied with commercial application equipment according to TxDOT’s guidelines:

- Sandy Soils – 2,500 lbs./acre
- Clay Soils – 2,000 lbs./acre

SEDIMENT RETENTION DEVICES

The sediment retention device testing flume has a 12 feet upper flume and a 2 feet lower flume. A 4 feet wide soil-filled area is used to install the material according to manufacturer's specifications. The reservoir continually mixes a slurry of well-graded artificial sediment. Turbidity meters monitor influent and effluent concentrations. Flowmeters are also used to monitor influent and effluent flow rates.

APPROVAL BY EXTENTION

Within TxDOT, “Approved by Extension” shall apply for “Slope Protection” applications only. Approval by Extension shall not apply to “Flexible Channel Liner” applications or to Hydraulic Mulch applications. For Slope Protection applications products, if the participant elects to evaluate a product on the severe slope conditions (2:1) only, and the product successfully meets the current minimum or maximum performance established by TxDOT, the product will also be included as a approved product on the less severe (3:1) conditions within the same soil texture group. For example, if a product is evaluated on the 2:1 clay and sand beds, and successfully meets the adopted sediment and vegetation density standards for 2:1 clay only, the product will also be listed as an approved product for the more gentle 3:1 clay beds.

If a product elects, however, to test on the gentler 1:3 beds, the product will not be added to the more severe (2:1) beds as an approved equal regardless of the performance of the material. If a product elects to be tested on both 3:1 and 3:1 beds, the product’s individual performance, as documented within each application, shall determine placement upon TxDOT’s Approved Product List (APL) and approval by extension shall not apply.

RELEASE OF PRODUCT PERFORMANCE DATA:

With the exception of the final research reports as published by the Texas Transportation Institute, all performance data will be released by TxDOT only. Performance data will be released only at the completion of an evaluation cycle, and all data, regardless of ranking, shall be published on all products by individual trade or brand name.

The Approved Product List for all products evaluated to date is available through TxDOT Internet Home Page without charge. TxDOT will maintain the latest complete performance data, including rankings, and make it available only to those states that are participating in the pooled research fund.

REVISION OF MINIMUM PERFORMANCE STANDARDS

Based upon statistical analysis of performance data as produced through the SEC Lab, TxDOT reserves the right to revise the minimum performance standards. In the event that an individual product’s performance data fails to meet any of the revised performance standards, the product will be removed from the APL during the next scheduled revision of the APL, and the product representative is provided the opportunity of retesting the identical product within the next available evaluation cycle as determined by the Lab Manager. If the product’s performance meets the newly adopted minimum performance standards, the product will remain on the APL.

CONTRACTOR’S OPTION

The APL will be maintained by TxDOT according to the classes and types as may be appropriate for the given products. It will be the Contractor’s option of using any product, provided that product is on the current APL for the class and type specified within the plans. Installation of the product will be in strict accordance with any product installation sheets as may be issued by TxDOT.

PRIVATE LABELING:

Within TxDOT, private labeling shall apply, and private labels will be added to the APL if the original manufacturer of the product evaluated at the SEC Lab certifies, to TxDOT’s satisfaction, that the private label brand is identical to the product tested and only distributed under other (private labels) brand names.

Additions or revisions to the APL due to private label name changes will be made only during the normally scheduled revision of the APL.

REQUIRED MANUFACTURER LITERATURE:

A product will not be accepted for evaluation at the SEC Lab, nor placed on the waiting list for future evaluation at the Lab unless the participant furnishes evidence that the product is currently being marketed under a discrete trade or brand name, and unless the product can demonstrate published installation literature.

All "Request for Performance Analysis" packets for products which do not include complete manufacturer's literature, or for products which are under development only, shall not be accepted for evaluation through the SEC Lab.

APPROVED PRODUCT LIST:

Based upon the performance data collected through the SEC Lab, TxDOT will establish and maintain a current Approved Product List (APL). A revised APL will be issued only after data analysis has been completed.

The current APL will be maintained on TxDOT's Internet Home Page at: <http://www.txdot.gov/inside-txdot/division/maintenance/erosion-control.html>. Alternatively, the report may be accessed on the TxDOT Home Page through the "Search" facility, using the words "erosion control report" in the search dialogue box.

Hard copies of the current APL may also be secured through the Maintenance Field Support Section - Vegetation Management of the Maintenance Division, 125 E. 11th Street, Austin, TX 78701-2483, telephone (512)416-3092, fax (512)416-3044, e-mail: Jacob.Eickstead@txdot.gov.

PRODUCT BRAND OR TRADE NAME REVISIONS:

The manufacturer of a product evaluated at the SEC Lab shall notify TxDOT should any revisions to the trade or brand name for the product be made. The manufacturer must provide the revised trade or brand name for the product and must further certify, to TxDOT's satisfaction, that the action reflects a revision to the trade or brand name only, and that no material properties were revised. The manufacturer must also notify TxDOT if any brand or trade name revisions are made to any of the product's private labels.

All revisions to the APL necessitated by revisions to brand or trade names will occur only within the normally scheduled revision of the APL which is typically released during February or March of each year.

WORLD WIDE WEB

This document, and the official Approved Product List, will be maintained on TxDOT's Internet Home Page at <http://www.txdot.gov/inside-txdot/division/maintenance/erosion-control.html>. Hard copies of the document are also available to interested parties at no charge.

TTI also maintains an extensive Internet Web presence on the Lab. You may access this site through the Environmental Management Program, at: <https://tti.tamu.edu/facilities/sec-lab/>.

SUMMARY:

The TxDOT/TTI Sediment and Erosion Control (SEC) Laboratory is a unique facility which provides TxDOT and the specifying community data on the performance of a product's ability to protect the natural environment through controlled, formal performance evaluations.

The SEC Lab provides industry with a timely, uniform and fair method through which their products are evaluated for possible usage within TxDOT's construction and maintenance activities. The evaluation program seeks to establish and maintain the greatest number of individual products on the APL possible, provided those products have demonstrated their ability to meet adopted minimum performance standards for the appropriate use applications.

FUTURE DIRECTIONS:

As the new protocols are installed and refined, TxDOT and TTI are planning to expand the research program to include analysis of runoff samples to test for contaminants, tenting evaluation, and laboratory methods to determine product longevity.

PROGRAM CONTACT PERSONNEL:

To discuss or request information on TxDOT's overall evaluation program for erosion control products or secure a hard copy of this report, contact Jacob Eickstead, Texas Department of Transportation, Maintenance Division, Maintenance Field Support Section - Vegetation Management, 125 E. 11th Street, Austin, TX 78701-2483, phone (512)416-3092, fax (512)416-3044, or through e-mail: Jacob.Eickstead@txdot.gov.

To secure a "Application for Testing" packet, to inquire about waiting list or evaluation schedules or to arrange a visit to the evaluation facility, contact Jett McFalls, Lab Manager, Texas Transportation Institute Environmental Management Program, Texas A&M University System, 3135 TAMUS, College Station, TX 77843-3135, phone (979)847-8709, fax (979)862-1759, or through Email to: j-mcfalls@ttimail.tamu.edu .