



- 5 13/16" X 8 13/16" X 3 1/8"
  - 5 13/16" X 5 13/16" X 3 1/8"
- LANDSCAPE PAVER SIZES**

**LANDSCAPE PAVERS - PLAN VIEW**

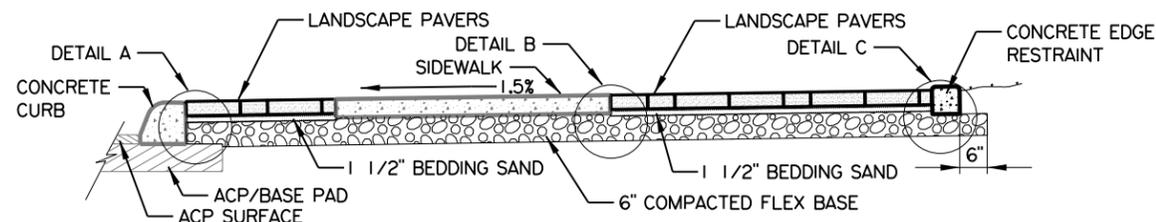


**LANDSCAPE PAVERS - SECTION VIEW**

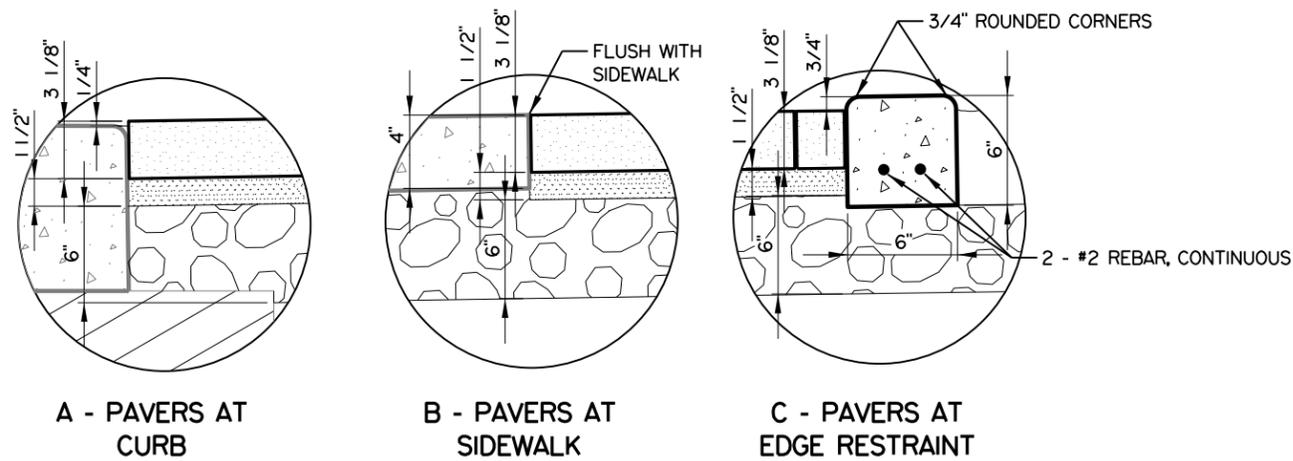


**LANDSCAPE PAVER NOTES:**

1. USE 3 1/8" (80 mm) VENETIAN STONE IN A STANDARD FINISH (NON-TUMBLED) AND A CAST STONE COLOR.
2. LAY IN A NOMINAL 6" X 6" AND 6" X 9" TOW STONE COMBO RUNNER BOND (29) PATTERN AS SHOWN ON THE PAVESTONE PATTERN CHART FOR VENETIAN STONE COMBO (<http://www.pavestone.com/wp-content/uploads/Venetian-247-Info-Sheet-with-Installation-Patterns.pdf>) AND AS SHOWN ON THIS SHEET.
3. THE PAVER, COLOR, AND PATTERN ARE BY PAVESTONE AND ARE USED FOR EXAMPLE ONLY. APPROVED EQUALS ARE ACCEPTABLE.
4. FOR THE PAVER BASE MATERIAL, USE FLEX BASE IN CONFORMANCE WITH ITEM 247 - FLEXIBLE BASE, WITH THE TYPE AND GRADE AS SPECIFIED ELSEWHERE IN THE PLANS. IF NOT SPECIFIED ELSEWHERE IN THE PLANS, USE THE TYPE AND GRADE MOST PREVALENT UNDER PRODUCTION IN THE LOCAL AREA.
5. USE CONCRETE EDGE RESTRAINT WHEN NO OTHER SOLID EDGE ABUTS THE LANDSCAPE PAVER AREA.

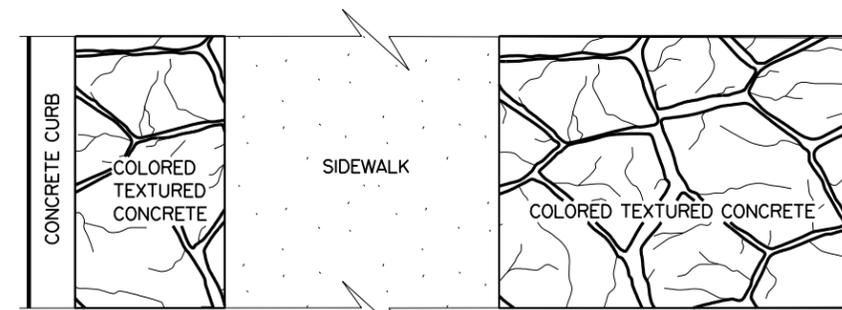





**COLORED TEXTURED CONCRETE - PLAN VIEW**

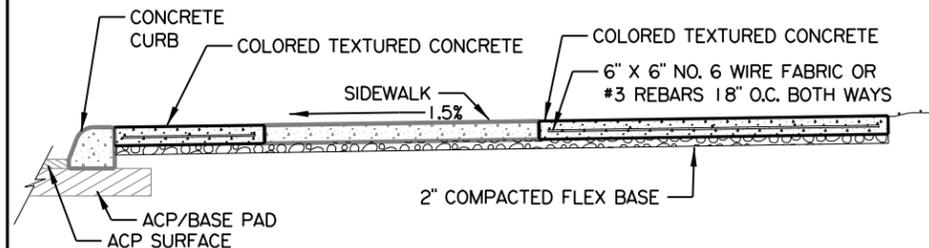

**COLORED TEXTURED CONCRETE - SECTION VIEW**

**COLORED TEXTURED CONCRETE NOTES:**

1. USE RANDOM SLATE PATTERN (TOOLS A, B, C, AND D) BY BOMANITE COPORATION. ([http://bomanite.com/wp-content/uploads/2015/07/RandomSlate\\_PatternSpotlight.pdf](http://bomanite.com/wp-content/uploads/2015/07/RandomSlate_PatternSpotlight.pdf))
2. FOR COLORANTS IN COLORED TEXTURED CONCRETE, APPLY DRY-SHAKE COLOR HARDENER AND POWDERED ANTIQUING RELEASE, APPLY BOTH ACCORDING TO THE MANUFACTURER'S RECOMMENDATIONS. SUPPLY THE ENGINEER WITH A COPY OF THE RECOMMENDATIONS.
3. COLORANTS:  
LITHOCHROME R COLOR HARDENER: OYSTER WHITE (COLOR NO. 3611)  
LITHOCHROME ANTIQUING RELEASE: SLATE GRAY (COLOR NO. A-50)
4. PATTERN LISTED IS BY BOMANITE CORPORATION. COLORANTS LISTED ARE BY L.M. SCOFIELD CO. THESE ARE USED FOR EXAMPLES ONLY. APPROVED EQUALS ARE ACCEPTABLE.
5. PROTECT ADJACENT CONCRETE SURFACES FROM COLORANTS.
6. FOR THE COLORED TEXTURED CONCRETE BASE MATERIAL, USE FLEX BASE IN CONFORMANCE WITH ITEM 247 - FLEX BASE WITH THE TYPE AND GRADE AS SPECIFIED ELSEWHERE IN THE PLANS. IF NOT SPECIFIED ELSEWHERE IN THE PLANS, USE THE TYPE AND GRADE MOST PREVALENT UNDER PRODUCTION IN THE LOCAL AREA.

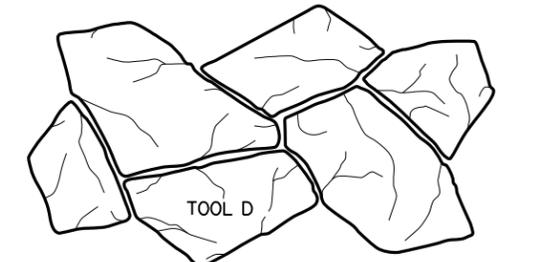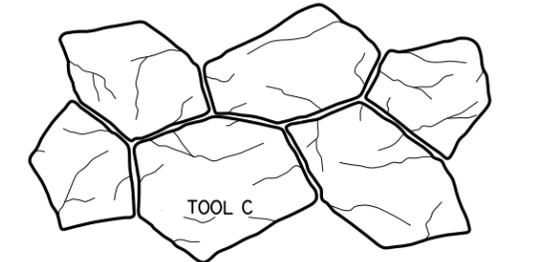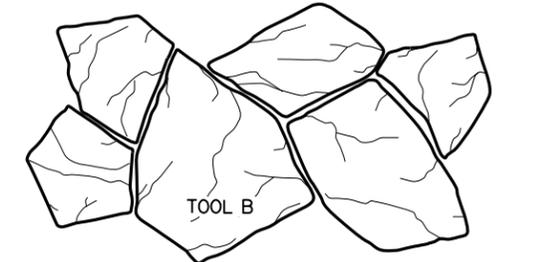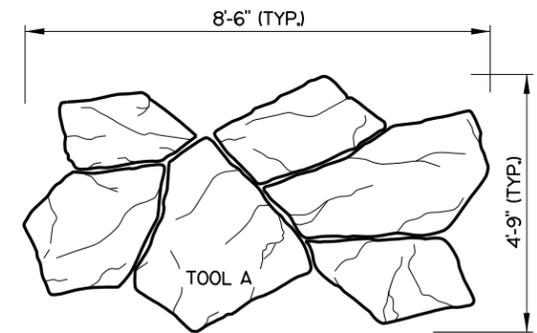

**STAMP PATTERNS**

**HILL COUNTRY THEME**

NOT TO SCALE



**COLORED TEXTURED CONCRETE AND LANDSCAPE PAVERS**

*San Antonio District Standard*

T:\Engdata\Standards\ColoredTexturedConc\PAVERS.dgn PREPARED BY AND FOR USE OF TxDOT.		STATE DISTRICT	FEDERAL REGION	FEDERAL AID PROJECT	SHEET
ORIGINAL DRAWING DATE: 03-28-17	SAT	6			
REVISIONS		COUNTY	CONTROL	SECTION	JOB
					HIGHWAY

\$ TIMES

\$ DATES

\$ FILES