

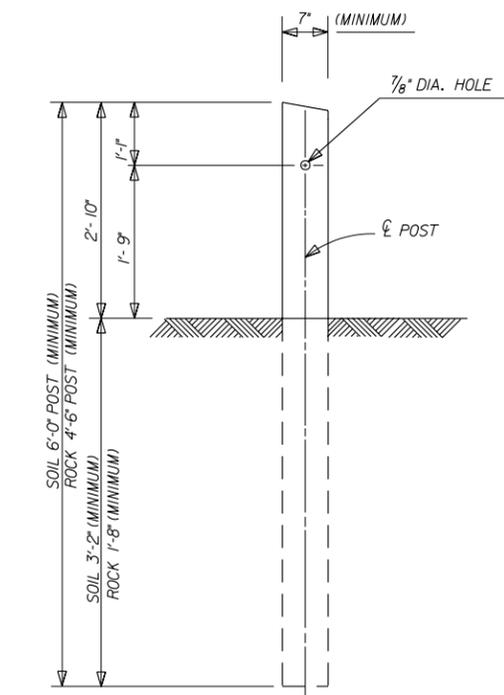



BARRIER FENCE UNIT



WOOD POST DETAIL

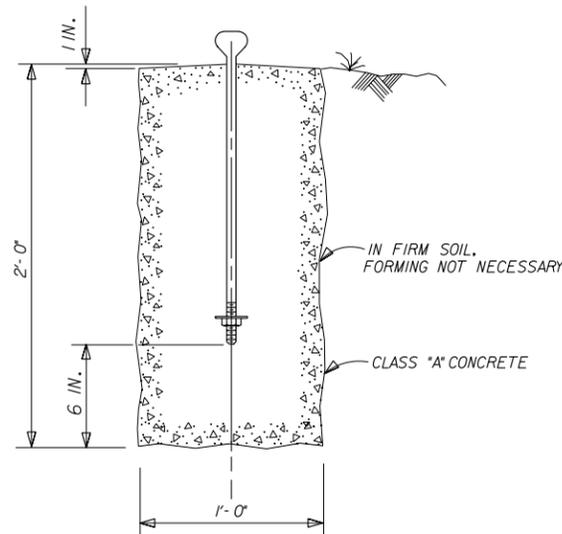


CONCRETE ANCHOR DETAIL

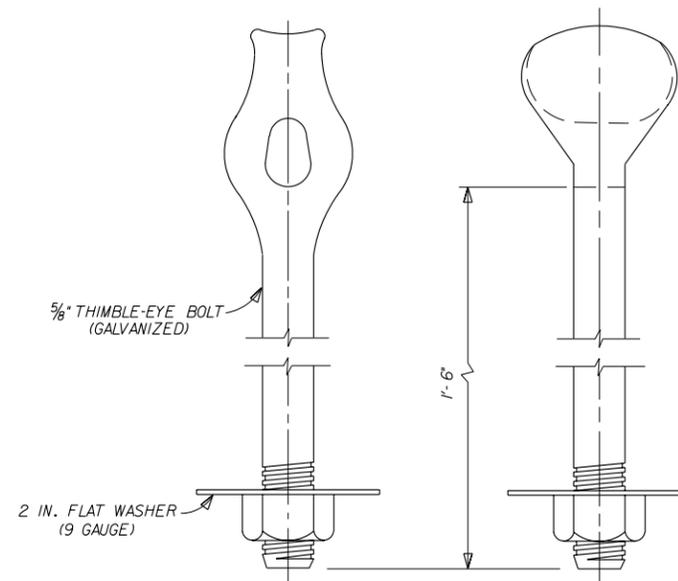

THIMBLE-EYE BOLT DETAIL


REFLECTOR DETAIL

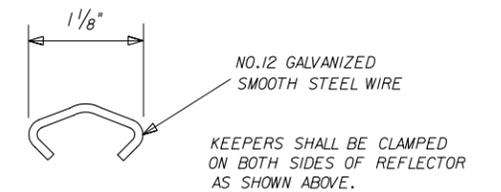


REFLECTOR KEEPER DETAIL

GENERAL NOTES

1. ALL CONCRETE SHALL BE CLASS "A". CONCRETE ANCHORS SHALL CURE AT LEAST FIVE (5) DAYS BEFORE THE CABLE IS PLACED.
2. ALL CABLE FITTINGS SHALL BE HOT-DIP GALVANIZED IN ACCORDANCE A.S.T.M. DESIGNATION A153.
3. ALL POSTS SHALL CONFORM TO "TIMBER POST" AS DESCRIBED IN ITEM "METAL BEAM GUARD FENCE". THE BOTTOM SHALL BE SAWED OFF SQUARE AND THE TOP SHALL BE BEVELED 10° TIMBER POSTS SHALL NOT BE PAINTED.
4. THE ENTIRE SURFACE OF THE REFLECTOR SHALL BE COVERED WITH A REFLECTORIZED SHEETING MATERIAL CONFORMING TO DEPARTMENTAL SPECIFICATION D-9-8300 "FLAT SURFACE REFLECTIVE SHEETING", TYPE D.
5. THE BEVELED TOPS OF ALL THE POSTS SHALL FACE THE SAME DIRECTION, AS DIRECTED BY THE ENGINEER.

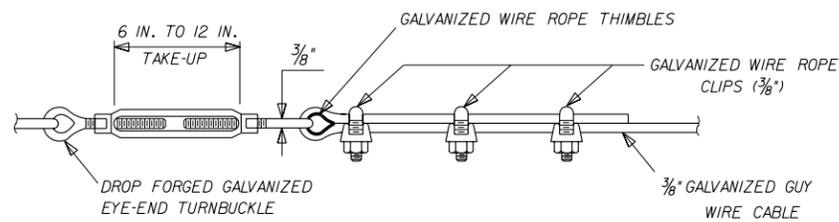

GUY WIRE CABLE CONNECTION (at turnbuckles & eyebolts) DETAIL

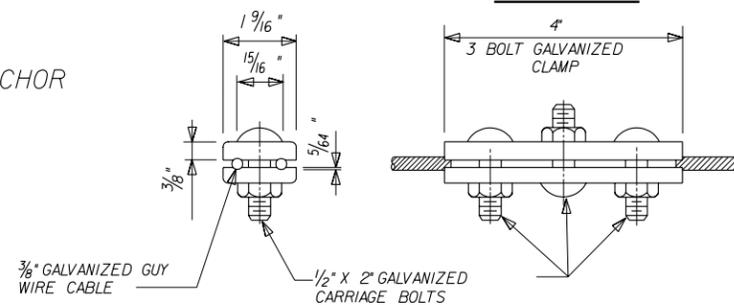

SLIP JOINT DETAIL

SAN ANTONIO DISTRICT STANDARD (WOOD POST & CABLE)

STRUCTURE DESIGN / BRIDGE / STDS / TBPCABLE.DGN

FED. RD. DIST. NO.	FEDERAL AID PROJECT NO.	SHEET NO.
6		
STATE	STATE DISTRICT	COUNTY
TEXAS	SAT	
CONT.	SECT.	JOB HIGHWAY NO.