
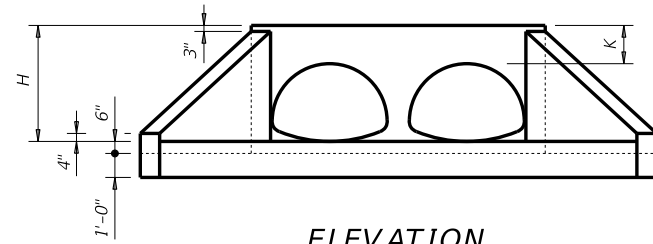


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


**TABLE OF VARIABLE DIMENSIONS AND QUANTITIES FOR ONE HEADWALL** ⑤

Slope	Design	Size of Pipe Arch		Values for One Pipe						Values to be Added for Each Add'l Pipe			
		Span	Rise	W	X	Y	L	Reinf (Lbs)	Conc (CY) ①	X and W	Reinf (Lbs)	Conc (CY) ①	
3:1	4	35"	24"	11' - 5 1/2"	4' - 2 3/4"	7' - 3"	8' - 4 1/2"	241	2.1	4' - 7"	83	1.0	
	5	42"	29"	13' - 5 3/4"	4' - 9 3/4"	8' - 6"	9' - 9 3/4"	299	2.7	5' - 5"	113	1.3	
	6	49"	33"	15' - 2 3/4"	5' - 4 3/4"	9' - 6"	10' - 11 3/4"	345	3.3	6' - 3"	130	1.7	
	7	57"	38"	17' - 4"	6' - 0 3/4"	10' - 0"	12' - 5"	400	4.2	7' - 2"	159	2.1	
	8	64"	43"	19' - 4 1/4"	6' - 7 3/4"	12' - 0"	13' - 10 1/4"	477	5.1	8' - 2"	199	2.6	
9	71"	47"	21' - 1 1/4"	7' - 2 3/4"	13' - 0"	15' - 0 1/4"	531	5.9	9' - 1"	226	3.1		
4:1	4	35"	24"	14' - 3"	4' - 2 3/4"	9' - 8"	11' - 2"	315	2.9	4' - 7"	94	1.2	
	5	42"	29"	16' - 9"	4' - 9 3/4"	11' - 4"	13' - 1"	379	3.9	5' - 5"	125	1.6	
	6	49"	33"	18' - 10 1/2"	5' - 4 3/4"	12' - 8"	14' - 7 1/2"	455	4.7	6' - 3"	152	2.0	
	7	57"	38"	21' - 5 1/2"	6' - 0 3/4"	14' - 4"	16' - 6 3/4"	532	5.9	7' - 2"	180	2.6	
	8	64"	43"	23' - 11 3/4"	6' - 7 3/4"	16' - 0"	18' - 5 3/4"	631	7.2	8' - 2"	229	3.2	
9	71"	47"	26' - 1 1/4"	7' - 2 3/4"	17' - 4"	20' - 0 1/4"	706	8.4	9' - 1"	261	3.9		
6:1	4	35"	24"	19' - 10"	4' - 2 3/4"	14' - 6"	16' - 9"	468	5.0	4' - 7"	112	1.6	
	5	42"	29"	23' - 3 1/2"	4' - 9 3/4"	17' - 0"	19' - 7 1/2"	585	6.6	5' - 5"	154	2.2	
	6	49"	33"	26' - 2 1/4"	5' - 4 3/4"	19' - 0"	21' - 11 1/4"	711	8.2	6' - 3"	187	2.8	
	7	57"	38"	29' - 9"	6' - 0 3/4"	21' - 6"	24' - 10"	852	10.3	7' - 2"	233	3.5	
	8	64"	43"	33' - 2 1/2"	6' - 7 3/4"	24' - 0"	27' - 8 1/2"	996	12.6	8' - 2"	289	4.4	
9	71"	47"	36' - 1 1/4"	7' - 2 3/4"	26' - 0"	30' - 0 1/4"	1,127	14.7	9' - 1"	336	5.3		


- Quantities shown are for concrete pipe and will increase slightly for metal pipe installation.
- For vehicle safety, reduce curb heights, if necessary, to provide a maximum 3" projection above finished grade. No changes will be made in quantities and no additional compensation will be allowed for this work.
- Provide a 1'-0" footing as shown where required to maintain 4" minimum cover for pipes.
- Dimensions shown are usual and maximum.
- Quantities shown are for one structure end. (One headwall)
- Min Length =  $6" + 3" \times \left( \frac{12 \times H - 7}{12 \times L} \right)$   
Max Length =  $12 \times H - 3" \times \left( \frac{12 \times H - 7}{12 \times L} \right) - 1"$
- Lengths of wings based on SL:1 slope along this line.

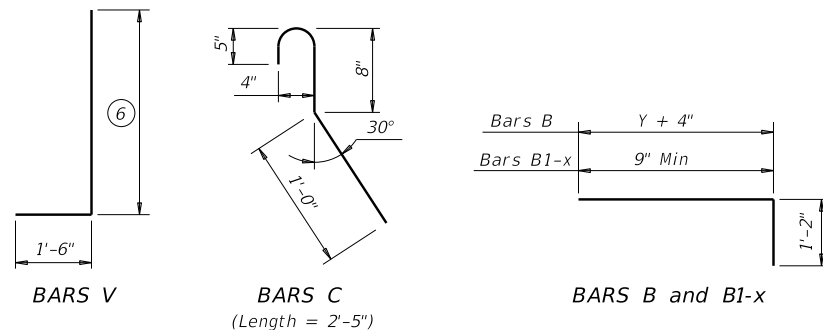


**ELEVATION**  
(Showing dimensions.)

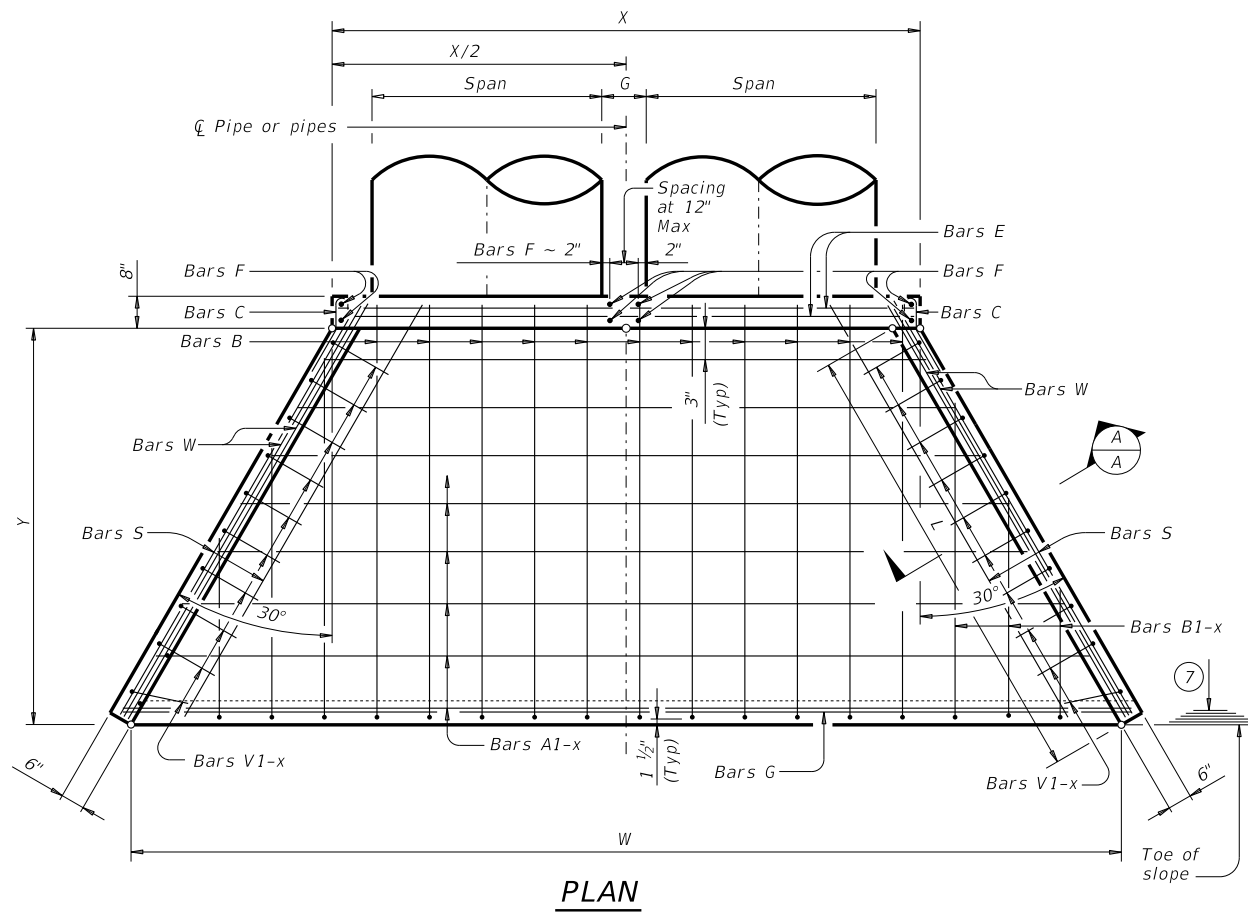

**PLAN**

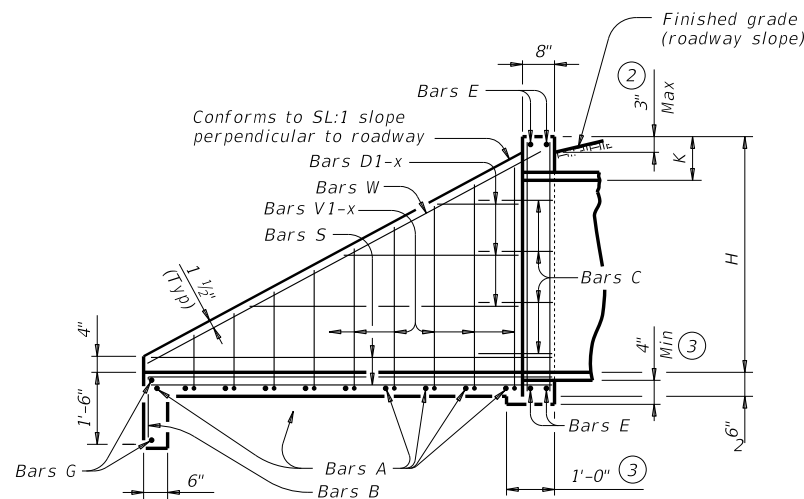

**TYPICAL WING ELEVATION**

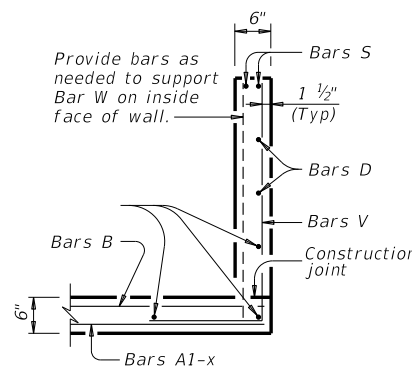

**SECTION A-A**

**TABLE OF REINFORCING STEEL** ⑤

Bar	Size	Spa	No.
A	#4	1' - 0"	~
B	#3	1' - 6"	~
C	#4	1' - 0"	~
D	#3	1' - 0"	~
E	#5	~	4
F	#5	~	~
G	#3	~	2
S	#4	~	6
V	#4	1' - 0"	~
W	#5	~	4

**TABLE OF CONSTANT DIMENSIONS**

Design	Size of Pipe Arch		G	K ④	H
	Span	Rise			
4	35"	24"	1' - 8"	1' - 0"	3' - 0"
5	42"	29"	1' - 11"	1' - 0"	3' - 5"
6	49"	33"	2' - 2"	1' - 0"	3' - 9"
7	57"	38"	2' - 5"	1' - 0"	4' - 2"
8	64"	43"	2' - 10"	1' - 0"	4' - 7"
9	71"	47"	3' - 2"	1' - 0"	4' - 11"

**MATERIAL NOTES:**

- Provide Grade 60 reinforcing steel.
- Provide galvanized reinforcing steel, if required elsewhere in the plans.
- Adjust reinforcing bars, as necessary, to provide a minimum clear cover of 1 1/2".
- Provide Class C concrete (f'c= 3,600 psi).
- Provide pipe runners that meet the requirements of ASTM A53 (Type E or S, Gr B), ASTM A500 Gr B, or API 5LX52.
- Provide ASTM A307 bolts and nuts.
- Provide ASTM A36 steel plates.
- Galvanize all steel components, except reinforcing unless required elsewhere in the plans, after lubrication. Repair galvanizing damaged during transport or construction in accordance with the specifications.
- For optional adhesive anchors, install adhesive anchorages in accordance with the manufacturer's instructions including hole size, drilling equipment and method, hole cleaning equipment and method, mixing and dispensing adhesive, and anchor insertion. Do not alter the manufacturer's mixing nozzle or dispenser. Anchorage rods must be clean and free of grease, oil, or any other foreign material. Demonstrate hole cleaning method to the Engineer for approval and continue the approved process for all anchorage locations. Test adhesive anchors in accordance with Item 450.3.3, "Tests." Test 3 anchors per 100 anchors installed.

**GENERAL NOTES:**

- Designed according to AASHTO LRFD Bridge Design Specifications.
- Safety end treatments (SET) shown herein are intended for use in those installations where out of control vehicles are likely to traverse the openings approximately perpendicular to the pipe runners.
- The safety pipe runners are designed for a traversing load of 1,800 pounds at yield as recommended by Research Report 280-1, "Safety Treatment of Roadside Cross-Drainage Structures", Texas Transportation Institute, March 1981.
- All bolts, nuts, washers, brackets, angles and pipe runners are considered parts of the safety end treatment for payment.


Cover dimensions are clear dimensions, unless noted otherwise. Reinforcing dimensions are out-to-out of bars.

SHEET 1 OF 3

		<b>Bridge Division Standard</b>	
<b>SAFETY END TREATMENT WITH FLARED WINGS FOR 0° SKEW ARCH PIPE CULVERTS TYPE I ~ CROSS DRAINAGE</b>			
<b>SETP-FW-A-0</b>			
FILE: CD-SETP-FWA0-20.dgn	DN: GAF	CK: CAT	DW: BWH
©TxDOT February 2020	CONT	SECT	JOB
REVISIONS	DIST		COUNTY
			SHEET NO.


DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

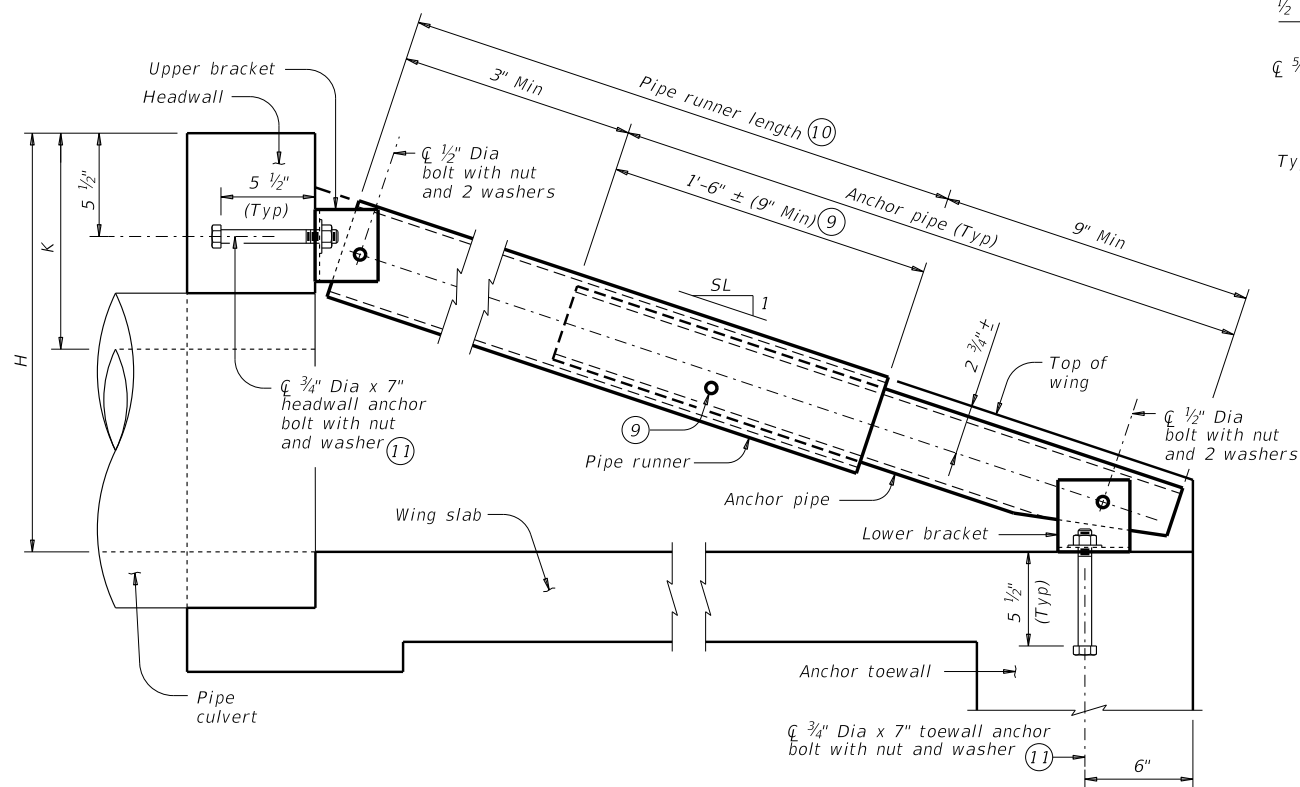

**SECTION B-B**


(Showing headwall pipe runner. Except for upper bracket, wingwall pipe runners are similar.)

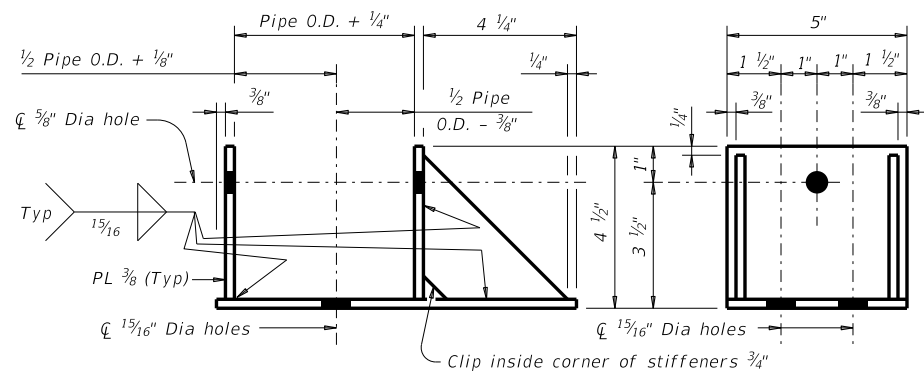

**ELEVATION**

**SIDE VIEW**

Install 3/4 inch anchor bolt in hole nearest to the headwall. Other bolt hole is intended for use on the opposite hand wingwall.

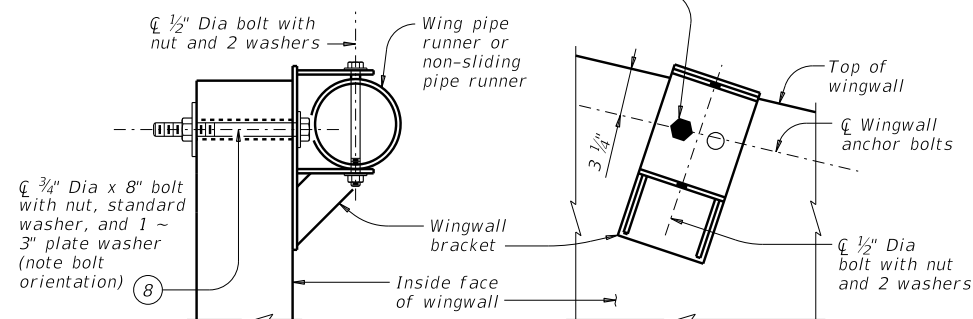

**SECTION C-C**


(Showing installed bracket.)

**ELEVATION**

(Showing installed bracket normal to wall. Pipe not shown for clarity.)


NOTE: Match the wingwall bracket to the upper bracket size.

**WINGWALL BRACKET DETAILS**

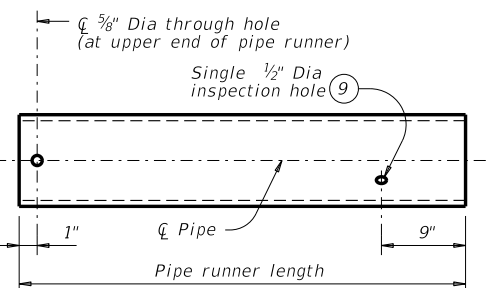


**PIPE RUNNER DETAILS**

Note: Use pipe diameter required for headwall pipe runner for wingwall pipe runner.

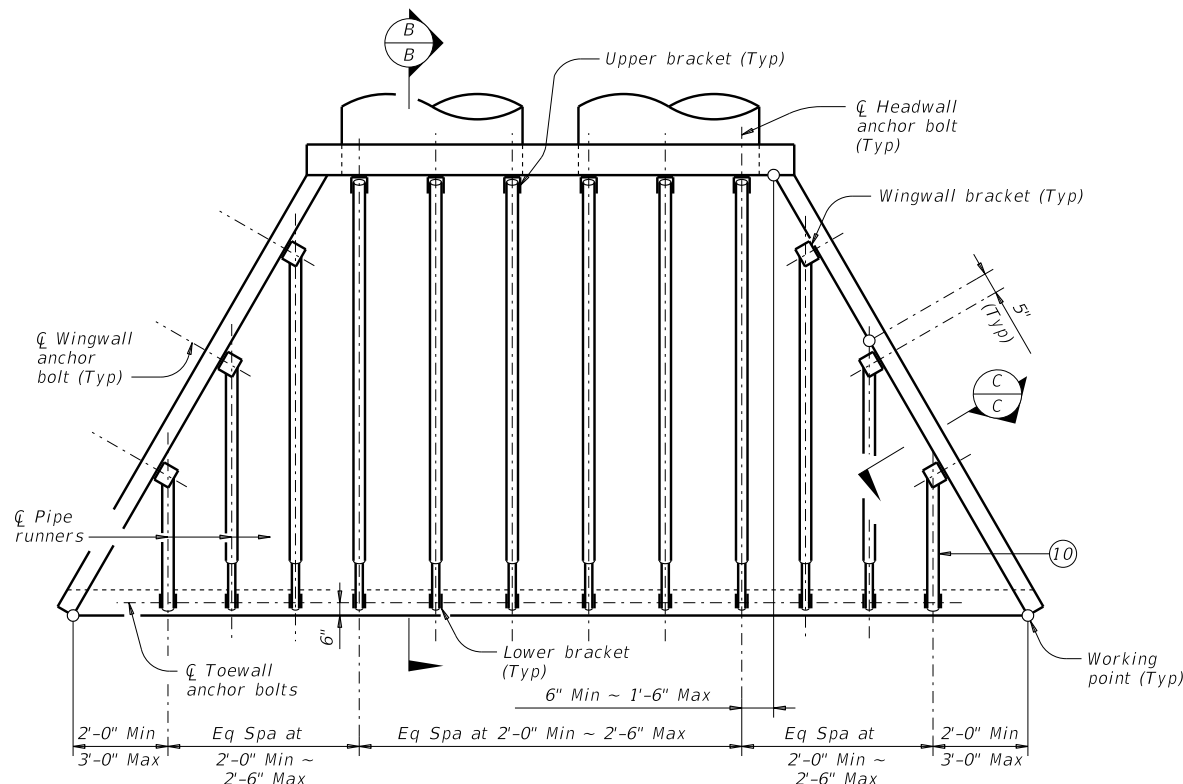

**PIPE RUNNER PLAN**

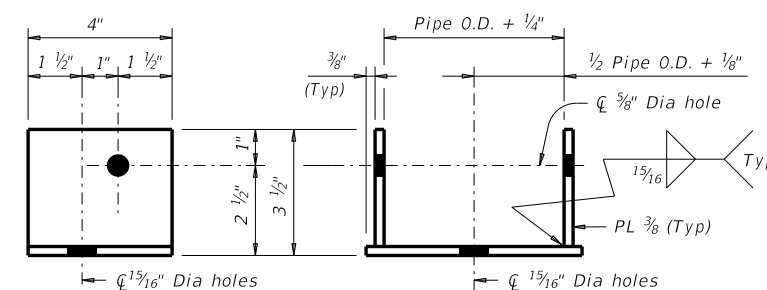


**SIDE VIEW**

**ELEVATION**


NOTE: Match upper and lower brackets, except for the brackets used with non-sliding pipe runners, with the required pipe diameters as shown in the table.

**UPPER AND LOWER BRACKET DETAILS**

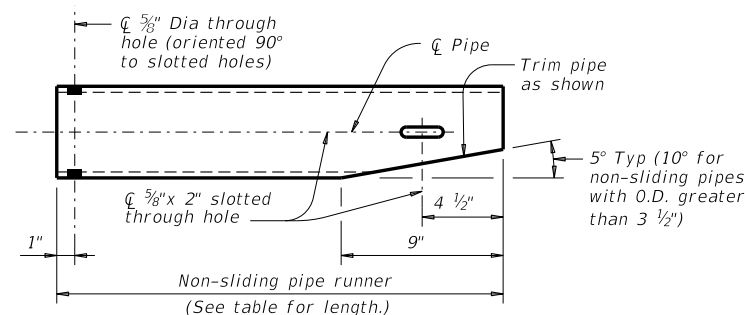

Note: Pipe size is the same as required for headwall pipe runner. Adjust the corresponding lower bracket accordingly.

**NON-SLIDING PIPE RUNNER DETAILS**

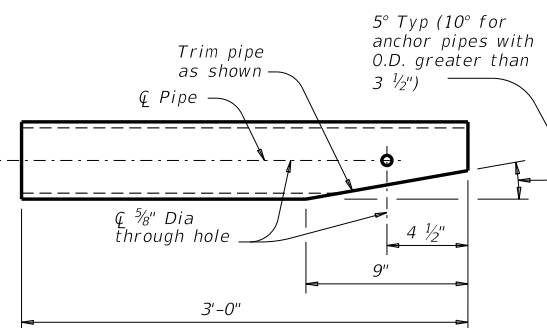

**ANCHOR PIPE DETAILS**

SHEET 2 OF 3

		<b>Bridge Division Standard</b>	
<b>SAFETY END TREATMENT WITH FLARED WINGS FOR 0° SKEW ARCH PIPE CULVERTS TYPE I ~ CROSS DRAINAGE</b>			
<b>SETP-FW-A-0</b>			
FILE: CD-SETP-FWA0-20.dgn	DN: GAF	CK: CAT	DW: TxDOT
©TxDOT February 2020	CONT SECT	JOB	HIGHWAY
REVISIONS			
DIST	COUNTY	SHEET NO.	

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act." No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

Side Slope	Arch Pipe Culvert Design	L1	P1	No. of Spaces in L3	L3 Overall Dimension	P2	No. of Spaces in L4	L4 Overall Dimension	Headwall Pipe Runner Length	No. of Wing Pipes (13)	Longest Wingwall Pipe Runner Length	Shortest Wingwall Pipe Runner Length	Non-Sliding Pipe Length	Pipe Runner Size (14)	Total Length of Wingwall Pipe Runners (13)
3:1	4	0'-6"	2'-3"	1	2'-5 1/4"	4'-1"	0	N/A	5'-11 1/2"	2	2'-0 1/2"	2'-0 1/2"	N/A	3" STD	4'-1"
	5	0'-7"	3'-0"	1	2'-6"	5'-7"	0	N/A	7'-3 1/4"	2	3'-5"	3'-5"	N/A	3" STD	6'-10"
	6	1'-0"	2'-0"	2	4'-5 3/4"	3'-7"	1	4'-5 3/4"	8'-4"	4	5'-8 1/4"	5'-8 1/4"	3'-1"	4" STD	17'-6 1/2"
	7	1'-3"	2'-6"	2	4'-11 1/2"	4'-7"	1	4'-11 1/2"	9'-7 3/4"	4	7'-0 1/4"	2'-6"	N/A	4" STD	19'-0 1/2"
	8	0'-6"	2'-6"	2	4'-11 1/4"	4'-7"	1	4'-11 1/4"	10'-11 1/2"	4	7'-0"	2'-6"	N/A	4" STD	19'-0"
4:1	4	0'-6"	2'-0"	2	4'-1"	3'-7"	1	4'-1"	8'-3 1/4"	4	5'-1 3/4"	5'-1 3/4"	3'-0"	4" STD	16'-3 1/2"
	5	0'-7"	2'-2"	2	4'-11 1/2"	3'-11"	1	4'-11 1/2"	10'-0"	4	6'-2 3/4"	1'-9 3/4"	N/A	4" STD	16'-1"
	6	1'-0"	2'-0"	3	6'-3 3/4"	3'-7"	2	8'-5"	11'-4 1/2"	6	9'-0 1/4"	5'-3 1/4"	3'-0"	4" STD	34'-7"
	7	1'-3"	2'-0"	3	7'-6 1/4"	3'-7"	2	10'-0 1/2"	13'-1"	6	10'-5 1/2"	5'-11 3/4"	3'-0"	4" STD	38'-10 1/2"
	8	0'-6"	2'-3"	3	7'-5 3/4"	4'-1"	2	9'-11 3/4"	14'-9 3/4"	6	10'-10 1/4"	1'-11 1/2"	N/A	5" STD	38'-5 1/4"
6:1	4	0'-6"	2'-0"	3	6'-10 1/2"	3'-7"	2	9'-2"	13'-0 1/4"	6	9'-6"	5'-5 3/4"	2'-11 1/2"	4" STD	35'-10 1/2"
	5	0'-7"	3'-0"	3	7'-4 3/4"	5'-7"	2	9'-10 1/4"	15'-6 1/2"	6	11'-10 1/2"	3'-2 1/2"	N/A	5" STD	45'-3"
	6	1'-0"	2'-0"	4	9'-11 3/4"	3'-7"	3	14'-11 1/2"	17'-7"	8	14'-7"	5'-10"	2'-11 1/2"	5" STD	67'-2"
	7	1'-3"	2'-0"	5	11'-8"	3'-7"	4	18'-8"	20'-1 1/4"	10	17'-10"	5'-6 1/2"	2'-11 1/2"	5" STD	99'-5"
	8	0'-6"	2'-0"	5	12'-4 1/4"	3'-7"	4	19'-9 1/4"	22'-7 3/4"	10	18'-9 3/4"	5'-9 1/2"	2'-11 1/2"	5" STD	104'-4"
9	0'-9"	2'-0"	6	13'-9 1/4"	3'-7"	5	22'-11 1/4"	24'-8"	12	21'-7"	5'-5 3/4"	2'-11 1/2"	5" STD	141'-2 3/4"	

- (12) If the outermost wing pipe runner is a non-sliding pipe runner, consider the next outermost wing pipe runner the shortest.
- (13) Quantities shown include, if present, the non-sliding pipes.
- (14) The anchor pipe size is the next smaller size than the pipe runner size.

Pipe Size	Pipe O.D.	Pipe I.D.
2" STD	2.375"	2.067"
3" STD	3.500"	3.068"
4" STD	4.500"	4.026"
5" STD	5.563"	5.047"


Arch Pipe Culvert Design	No. of Pipe Culverts	No. of L2 Spaces	L2 Overall Dimension	No. of Headwall Pipes
4	1	1	2'-1"	2
	2	3	6'-8"	4
	3	5	11'-3"	6
	4	7	15'-10"	8
	5	9	20'-5"	10
	6	10	25'-0"	11
5	1	1	2'-6"	2
	2	4	7'-11"	5
	3	6	13'-4"	7
	4	8	18'-9"	9
	5	10	24'-2"	11
	6	12	29'-7"	13
6	1	1	2'-3"	2
	2	4	8'-6"	5
	3	6	14'-9"	7
	4	9	21'-0"	10
	5	11	27'-3"	12
	6	14	33'-6"	15
7	1	1	2'-5"	2
	2	4	9'-7"	5
	3	7	16'-9"	8
	4	10	23'-11"	11
	5	13	31'-1"	14
	6	16	38'-3"	17
8	1	2	4'-6"	3
	2	6	12'-8"	7
	3	9	20'-10"	10
	4	12	29'-0"	13
	5	15	37'-2"	16
	6	19	45'-4"	20
9	1	2	4'-7"	3
	2	6	13'-8"	7
	3	10	22'-9"	11
	4	13	31'-10"	14
	5	17	40'-11"	18
	6	20	50'-0"	21

**TOTAL PIPE LENGTHS FORMULAS:**

$$\text{Total Length of All Pipe Runners} = \frac{\text{Total Length of Wingwall Pipe Runners}}{\text{No. of Wing Pipe Runners}} + \left( \frac{\text{No. of Headwall Pipe Runners}}{\text{No. of Headwall Pipe Runners}} \right) \left( \frac{\text{Headwall Pipe Runner Length}}{\text{No. of Headwall Pipe Runners}} \right)$$

$$\text{Total Length of All Anchor Pipes} = (3.000') \left( \frac{\text{No. of Wing Pipe Runners}}{\text{No. of Wing Pipe Runners}} + \frac{\text{No. of Headwall Pipe Runners}}{\text{No. of Headwall Pipe Runners}} - \frac{\text{No. of Non-Sliding Pipe Runners}}{\text{No. of Non-Sliding Pipe Runners}} \right)$$

**SPECIAL NOTE:**  
 Note that the tabular quantities are given for estimating purposes only. It is likely that these quantities will change due to field conditions. Therefore, verify all dimensions in the field prior to fabrication of the safety end treatment components.

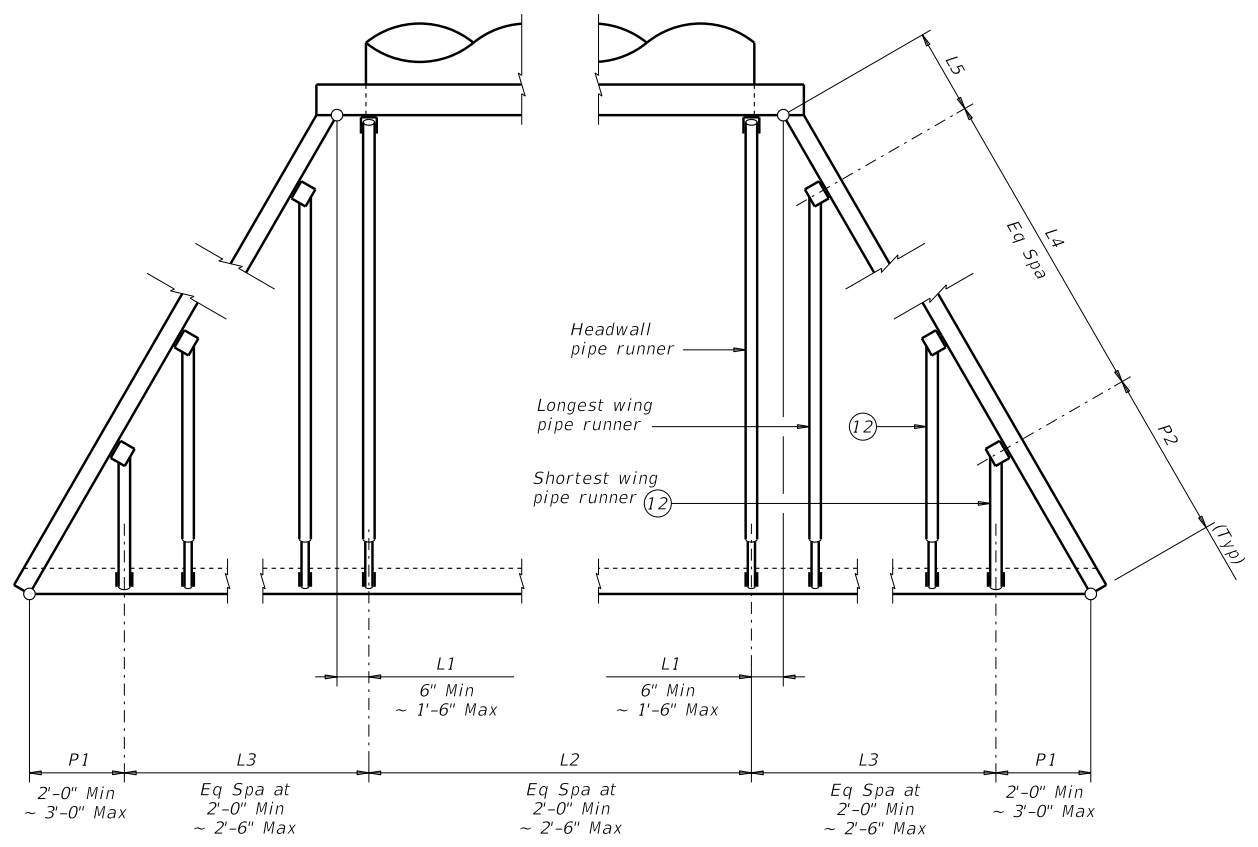

**PIPE RUNNER LAYOUT**

		<b>Bridge Division Standard</b>	
<b>SAFETY END TREATMENT WITH FLARED WINGS FOR 0° SKEW ARCH PIPE CULVERTS TYPE I ~ CROSS DRAINAGE</b>			
<b>SETP-FW-A-0</b>			
FILE: CD-SETP-FWAO-20.dgn	DN: GAF	CK: CAT	DW: TxDOT
©TxDOT February 2020	CONT	SECT	JOB
REVISIONS	DIST		COUNTY
			SHEET NO.

DATE: FILE: