




DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

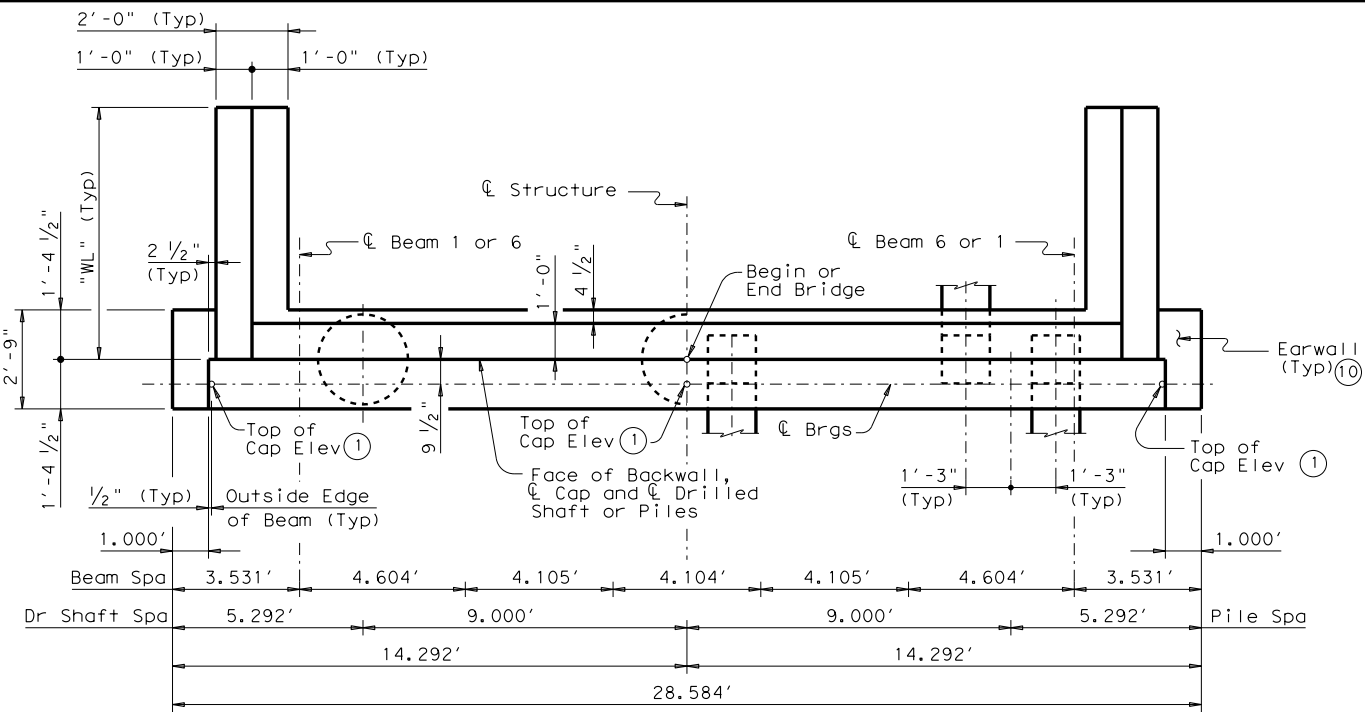

SHOWING DRILLED SHAFTS **PLAN** SHOWING BATTERED PILES

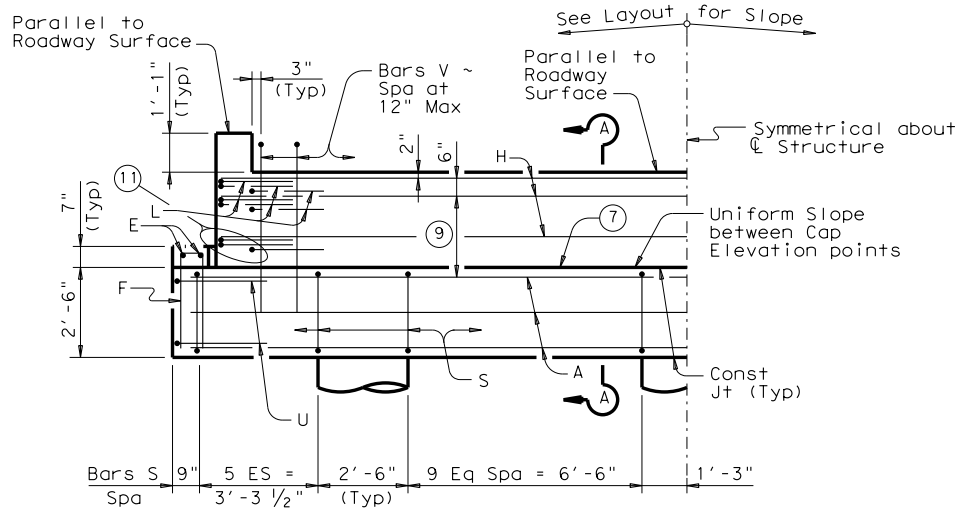


HALF ELEVATION ~ DRILLED SHAFT ABUTMENT

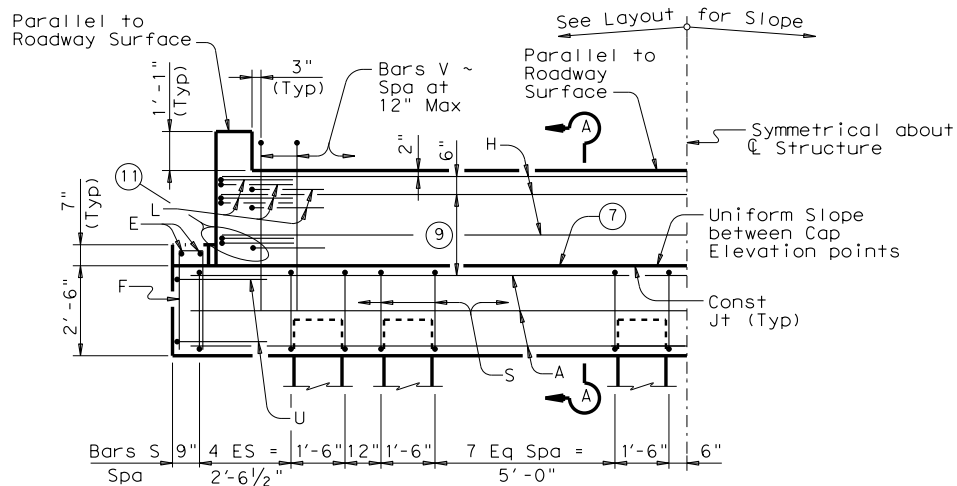


HALF ELEVATION ~ PILE ABUTMENT


(Showing 16" Piles ~ for Piles larger than 16", adjust Bars S spacing as required to avoid Piling)

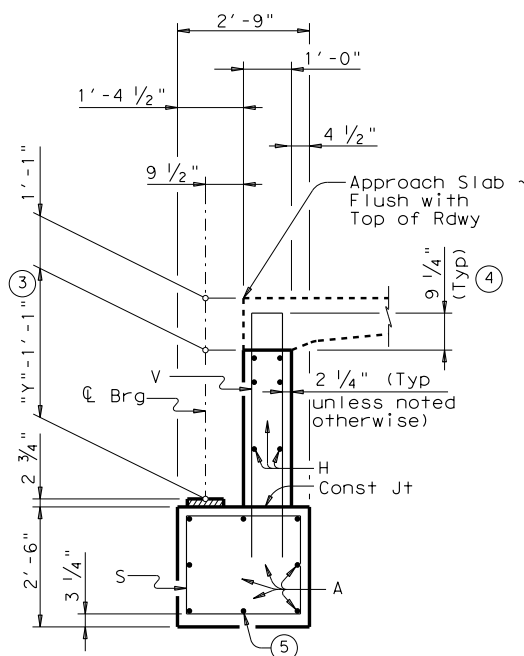

SECTION A-A
(Showing Approach Slab) 2

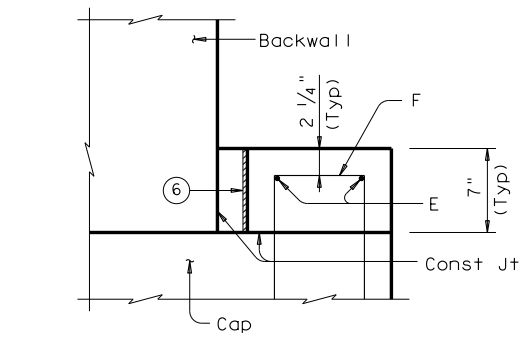

EARWALL ELEVATION DETAIL 10
(Slope top of earwall away from beams)

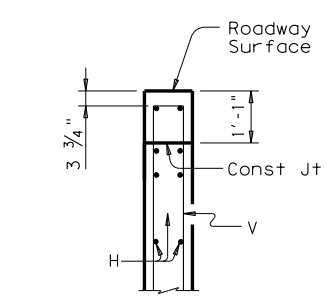

BACKWALL DETAIL
(Without Approach Slab) 2

| TABLE OF WINGWALL LENGTHS "WL" | |
|--------------------------------|---------|
| Beam Type | "WL" |
| B20 | 8.000' |
| B28 | 10.000' |
| B34 | 11.000' |

| TABLE OF FOUNDATION LOADS 8 | | |
|-----------------------------|--------------------|--------------------|
| Span Length | Drilled Shaft Load | Battered Pile Load |
| Ft | Tons/DS | Tons/Pile |
| 30 | 50 | 38 |
| 35 | 55 | 41 |
| 40 | 60 | 43 |
| 45 | 64 | 45 |
| 50 | 68 | 47 |
| 55 | 73 | 50 |
| 60 | 77 | 52 |
| 65 | 81 | 54 |
| 70 | 85 | 56 |
| 75 | 89 | 58 |
| 80 | 93 | 60 |
| 85 | 97 | 62 |
| 90 | 101 | 64 |
| 95 | 105 | 66 |

- 1 Top of Cap Elevations are based on section depths shown on Span Details.
- 2 See Bridge Layout for Joint type and to determine if Approach Slab is present.
- 3 See Span details for "Y" value.
- 4 Increase as required to maintain 3 3/4" from Finished Grade.
- 5 With pile foundations, replace Bar A, located at bottom centerline of cap with 2 ~ #11 x 5'-0" bars placed between pile groups. Deduct 93 Lbs from reinforcing steel total.
- 6 1/2" Preformed Bituminous Fiber material between beam and earwall. Bond to beam with an approved adhesive. Inside face of earwall to be cast with vertical side of beam.
- 7 Surface finish for the top of Cap will be a textured wood float finish. The surface must be level in the direction of the centerline of Beams.
- 8 Foundation loads are based on B34 beams.
- 9 Use 2 Eq Spa for B28 and B34 beams. Use 1 space for B20 beams.
- 10 Do not cast earwalls until beams are erected in their final position.
- 11 This set of Bars L only required for B28 and B34 beams.

GENERAL NOTES:
 Designed according to AASHTO LRFD Specifications.
 Concrete strength f'c = 3,600 psi.
 All reinforcing must be Grade 60.
 Designed for normal embankment header slope of 3:1 or 2:1.
 See Bridge Layout for beam type and foundation type, size and length.
 See standard FD for all foundation details and notes.
 See applicable rail details for rail anchorage cast in wingwalls.
 See standard CRR for riprap attachment details, if applicable.
 These abutment details may be used only with the following standards:
 SBBS-B20-24 or SBBO-B20-24
 SBBS-B28-24 or SBBO-B28-24
 SBBS-B34-24 or SBBO-B34-24




ABUTMENTS
PRESTR CONC BOX BEAMS
24' RDWY

ABB-24


| | | | | |
|-----------------------|-----------|-----------|-----------|-----------|
| FILE: bbstde17.dgn | DN: TxDOT | CK: TxDOT | DW: TxDOT | CK: TxDOT |
| ©TxDOT December, 2006 | CONT | SECT | JOB | HIGHWAY |
| 04-11: Span length. | DIST | COUNTY | SHEET NO. | |

DATE: FILE:

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

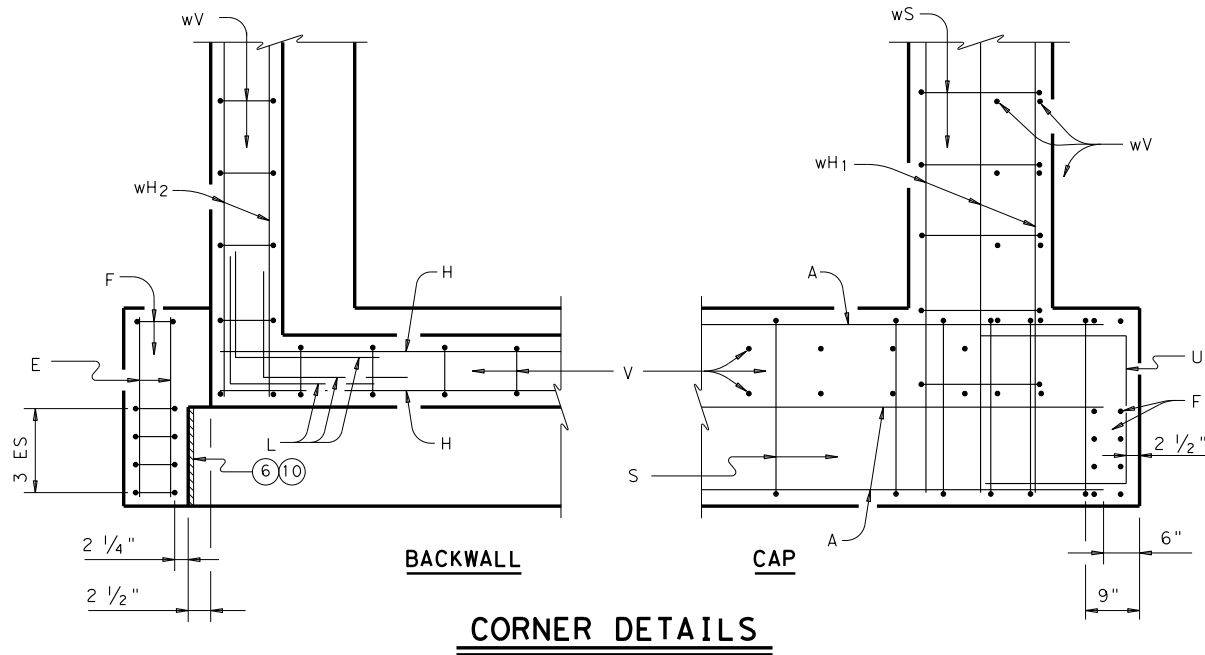

CORNER DETAILS

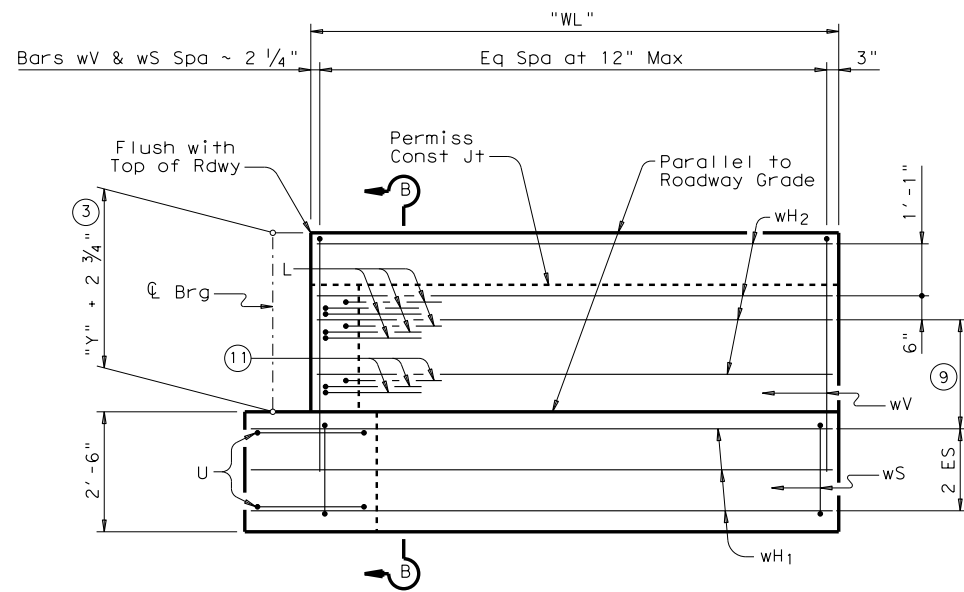

WINGWALL ELEVATION
(Earwall omitted for clarity)

TABLE OF ESTIMATED QUANTITIES (TYPE B20 BEAMS)⁽¹²⁾

| BAR | NO. | SIZE | LENGTH | WEIGHT |
|-----------------------------|-----|------|---------|----------|
| A (5) | 8 | #11 | 27'- 7" | 1,172 |
| E | 4 | # 5 | 2'- 5" | 10 |
| F | 10 | # 5 | 6'- 1" | 63 |
| H | 4 | # 6 | 25'-10" | 155 |
| L | 12 | # 6 | 4'- 0" | 72 |
| S | 32 | # 4 | 9'- 8" | 207 |
| U | 4 | # 6 | 7'- 3" | 44 |
| V | 25 | # 5 | 7'- 6" | 191 |
| wH1 | 14 | # 6 | 9'- 0" | 189 |
| wH2 | 12 | # 6 | 7'- 8" | 138 |
| wS | 18 | # 4 | 7'- 9" | 93 |
| wV | 18 | # 5 | 7'- 9" | 145 |
| Reinforcing Steel | | | | Lb 2,479 |
| Class "C" Concrete (w/Slab) | | | | CY 12.6 |
| Class "C" Concrete (w/ACP) | | | | CY 12.3 |


TABLE OF ESTIMATED QUANTITIES (TYPE B28 BEAMS)⁽¹²⁾

| BAR | NO. | SIZE | LENGTH | WEIGHT |
|-----------------------------|-----|------|---------|----------|
| A (5) | 8 | #11 | 27'- 7" | 1,172 |
| E | 4 | # 5 | 2'- 5" | 10 |
| F | 10 | # 5 | 6'- 1" | 63 |
| H | 6 | # 6 | 25'-10" | 233 |
| L | 18 | # 6 | 4'- 0" | 108 |
| S | 32 | # 4 | 9'- 8" | 207 |
| U | 4 | # 6 | 7'- 3" | 44 |
| V | 25 | # 5 | 8'- 9" | 226 |
| wH1 | 14 | # 6 | 11'- 0" | 231 |
| wH2 | 16 | # 6 | 9'- 8" | 232 |
| wS | 22 | # 4 | 7'- 9" | 114 |
| wV | 22 | # 5 | 9'- 0" | 207 |
| Reinforcing Steel | | | | Lb 2,847 |
| Class "C" Concrete (w/Slab) | | | | CY 14.7 |
| Class "C" Concrete (w/ACP) | | | | CY 14.4 |


TABLE OF ESTIMATED QUANTITIES (TYPE B34 BEAMS)⁽¹²⁾

| BAR | NO. | SIZE | LENGTH | WEIGHT |
|-----------------------------|-----|------|---------|----------|
| A (5) | 8 | #11 | 27'- 7" | 1,172 |
| E | 4 | # 5 | 2'- 5" | 10 |
| F | 10 | # 5 | 6'- 1" | 63 |
| H | 6 | # 6 | 25'-10" | 233 |
| L | 18 | # 6 | 4'- 0" | 108 |
| S | 32 | # 4 | 9'- 8" | 207 |
| U | 4 | # 6 | 7'- 3" | 44 |
| V | 25 | # 5 | 9'-10" | 254 |
| wH1 | 14 | # 6 | 12'- 0" | 252 |
| wH2 | 16 | # 6 | 10'- 8" | 256 |
| wS | 24 | # 4 | 7'- 9" | 124 |
| wV | 24 | # 5 | 10'- 1" | 252 |
| Reinforcing Steel | | | | Lb 2,975 |
| Class "C" Concrete (w/Slab) | | | | CY 16.2 |
| Class "C" Concrete (w/ACP) | | | | CY 15.9 |

- (3) See Span details for "Y" value.
- (5) With pile foundations, replace Bar A, located at bottom centerline of cap, with 2 ~ #11 x 5'-0" bars placed between pile groups. Deduct 93 Lbs from reinforcing steel total.
- (6) 1/2" Preformed Bituminous Fiber material between beam and earwall. Bond to beam with an approved adhesive. Inside face of earwall to be cast with vertical side of beam.
- (9) Use 2 Eq Spa for B28 and B34 beams and 1 space for B20 beams.
- (10) Do not cast earwalls until beams are erected in their final position.
- (11) This set of Bars L only required for B28 and B34 beams.
- (12) Quantities shown are for one Abutment only (with Approach Slab). With no Approach Slab, add 1.0 CY Class "C" concrete and 78 Lb reinforcing steel for 2 additional Bars H.

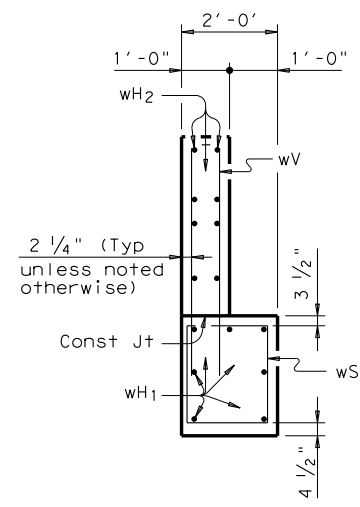

SECTION B-B

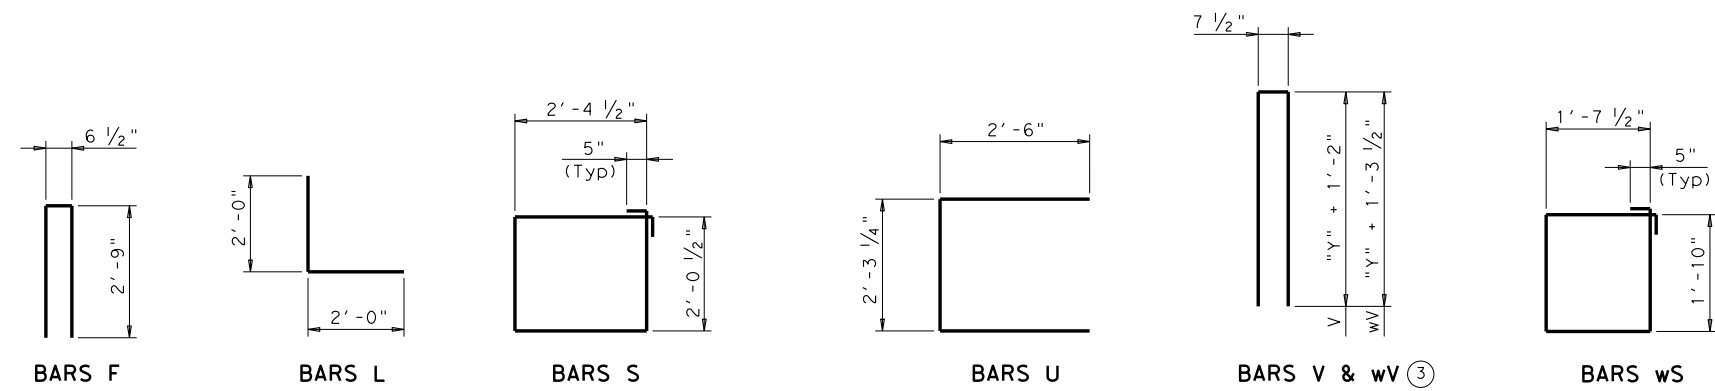

Texas Department of Transportation
ABUTMENTS
 PRESTR CONC BOX BEAMS
 24' RDWY

ABB-24

| | | | | |
|---------------------|-----------|-----------|-----------|-----------|
| FILE: bbstde17.dgn | DN: TxDOT | CK: TxDOT | DW: TxDOT | CK: TxDOT |
| CONT | SECT | JOB | HIGHWAY | |
| REVISIONS | | | | |
| 04-11: Span length. | DIST | COUNTY | SHEET NO. | |

DATE:
FILE: