



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:




BARS S

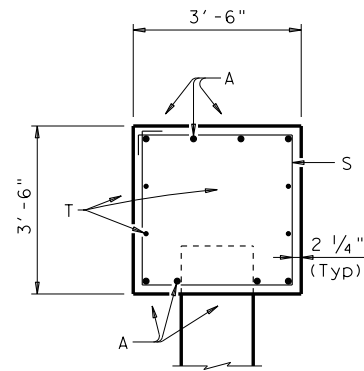

SECTION A-A

Level along a line perpendicular to \bar{C} Bent. Uniform slope between Left and Right Bearing Seat Elevations with wood float finish.

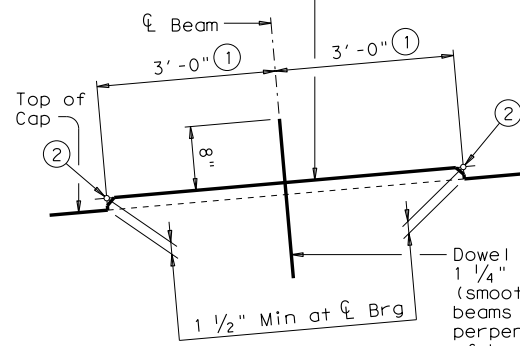

BEARING SEAT DETAIL

(Bearing surface must be clean and free of all loose material before placing bearing pad.)

TABLE OF MAXIMUM ALLOWABLE EXPOSED PILE HEIGHTS AND PILE LOADS (5)


Pile Type		Maximum Height	Maximum Load
Concrete	Steel	Ft	(Tons/Pile)
18" Sq	HP14x117 (6)	20	90
20" Sq	HP18x135	24	110
24" Sq	(7)	24	140

FOUNDATION LOADS


Span Average	Minimum Concrete Pile Size	5XB20 & 5XB28 X-Beams	
		Pile Loads	
Ft	In.	(Tons/Pile)	
40	18	65	
45		71	
50		76	
55		82	
60	20	88	
65		94	
70		99	
75		105	
80	24	110	
85		116	

TABLE OF ESTIMATED QUANTITIES

40' THRU 85' SPANS				
Bar	No.	Size	Length	Weight
A	8	#9	51'-8"	1,405
D (3)	4	1 1/4"D	1'-8"	28
S	53	#5	13'-6"	746
T	4	#5	51'-8"	216
Reinforcing Steel			Lb	2,395
Class "C" Concrete			CY	24.2

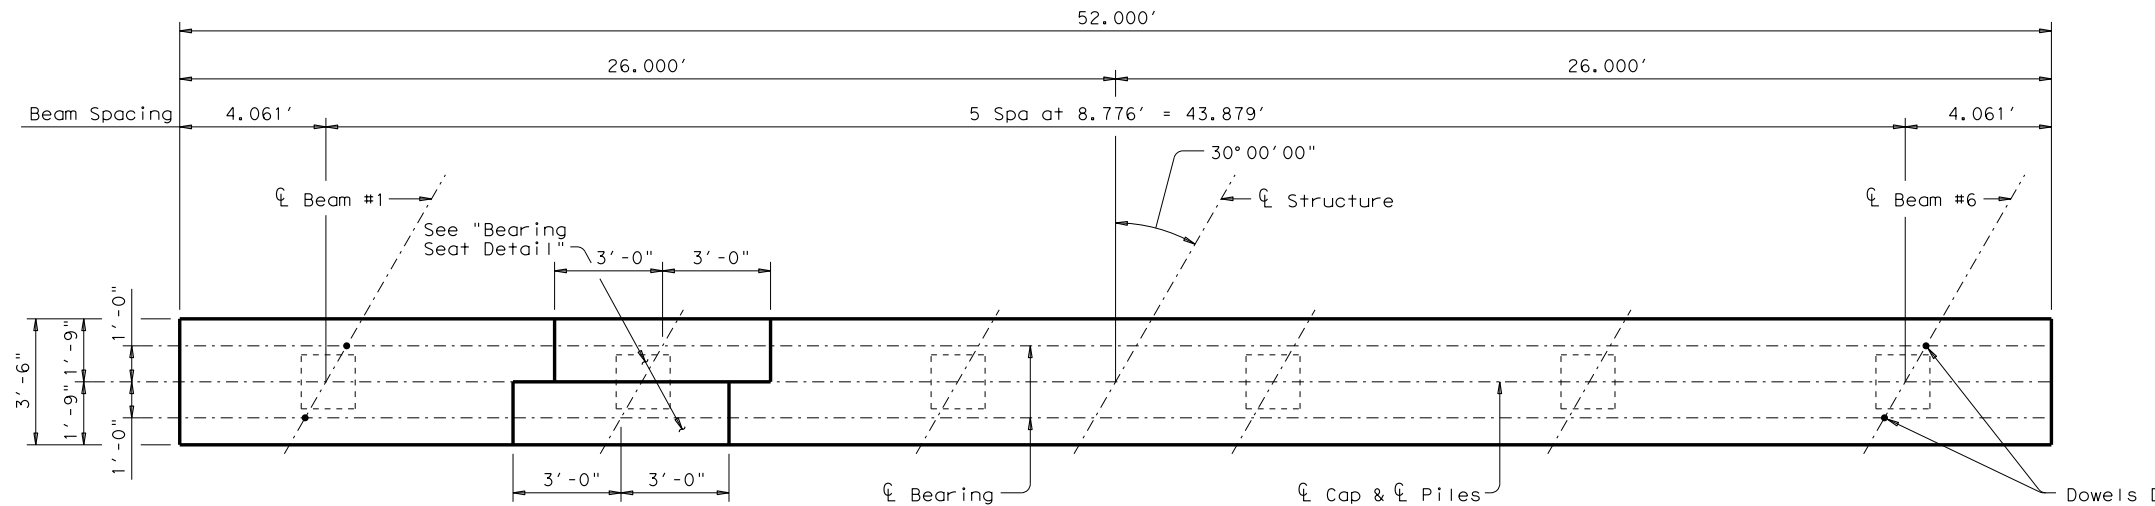

PLAN

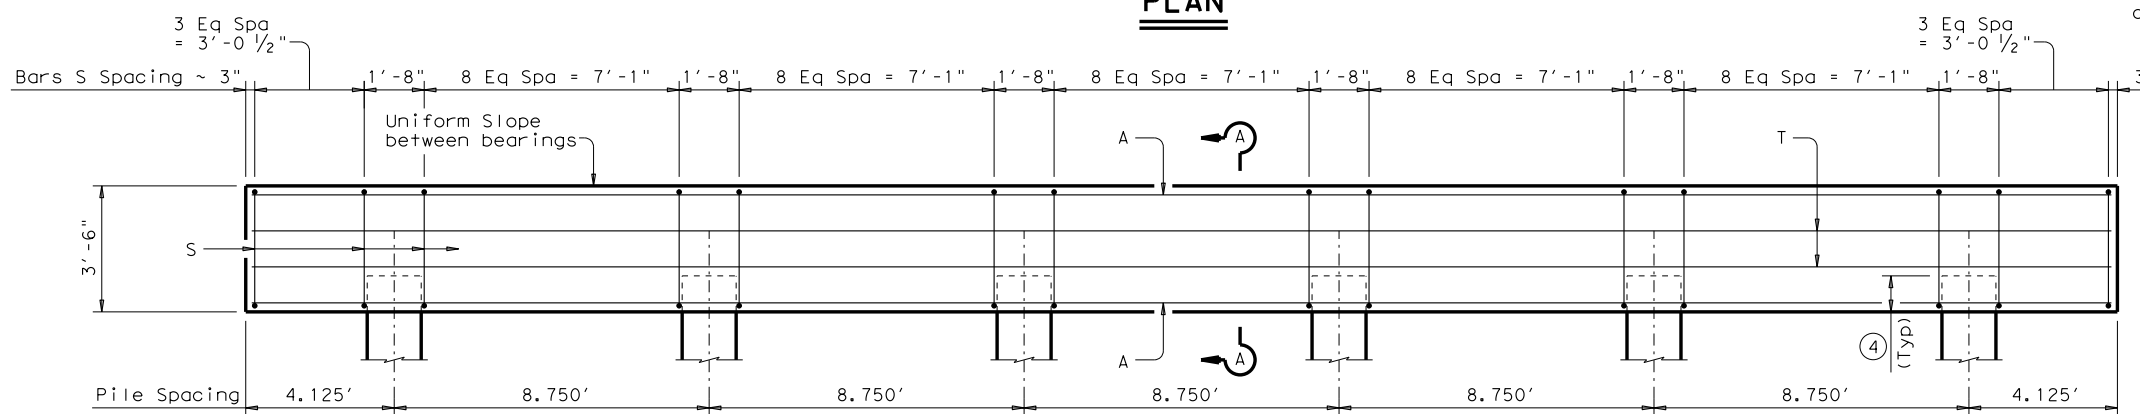

ELEVATION

- ① Measured along \bar{C} of Bearing.
- ② Right and left elevations and locations are provided elsewhere.
- ③ Omit Dowels D at end of units. Adjust reinforcing steel total accordingly.
- ④ See FD standard.
- ⑤ In areas of very soft soil or where scour is anticipated, maximum allowable exposed pile heights shall be evaluated by the Engineer prior to use of this standard.
- ⑥ When HP14 x 117 steel piling is specified in the plans, the Contractor has the option of furnishing either HP14 x 117 or HP16 x 101 steel piling.
- ⑦ Where no steel HP section is shown, a suitable HP equivalent to the square concrete pile has not been evaluated.

GENERAL NOTES:

Designed according to AASHTO LRFD Specifications.
 For Bents supporting unequal spans, the shorter span cannot be less than 80 percent of the longer span.
 These details are limited to an 85' maximum span length.
 Concrete strength $f'c = 3,600$ psi.
 All Cap reinforcing must be Grade 60.
 Galvanize dowel bars D.
 See Bridge Layout for piling size and length.
 See Foundation Details standard FD for all foundation details and notes.
 Bent selected shall be based on the average span length rounded up to the next 5 Ft increment.
 Details are drawn showing right forward skew. See Bridge Layout for actual skew direction.
 These bent details may be used with Standard SXB-44-30 only.

HL93 LOADING

		Bridge Division Standard	
INTERIOR TRESTLE BENTS TYPE 5XB20 AND 5XB28 PRESTR CONC X-BEAMS 44' ROADWAY 30°SKEW BTXB-44-30			
FILE: xbstde91.dgn	DN: JMH	CK: AM	DW: JTR
©TxDOT February 2012	CONT	SECT	JOB
REVISIONS	COUNTY		SHEET NO.