



DISCLAIMER:  
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

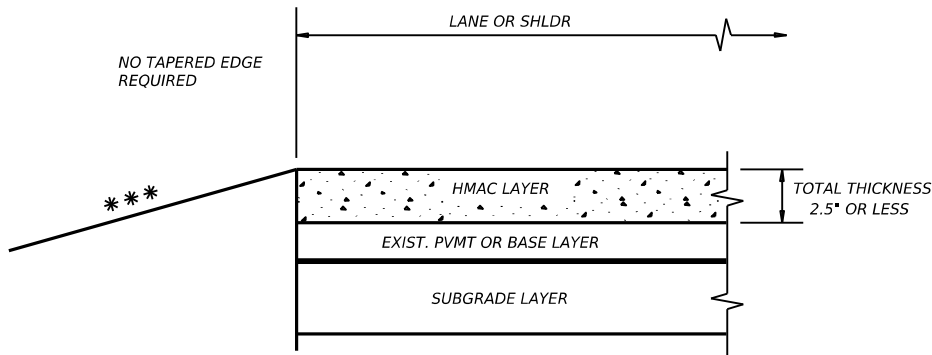

\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS


**CONDITION - 1**  
THIN HMAC SURFACES OR HMAC OVERLAY  
WITH THICKNESS OF 2.5" OR LESS

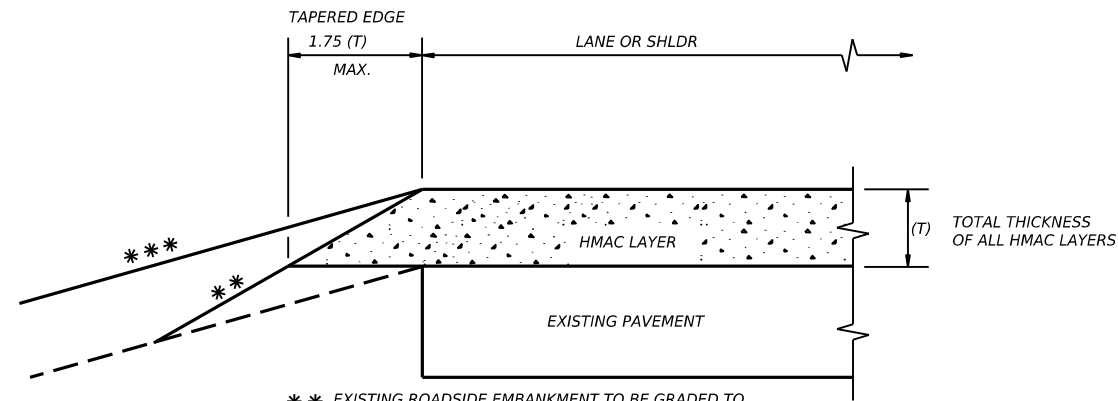

\*\* EXISTING ROADSIDE EMBANKMENT TO BE GRADED TO PRODUCE A SMOOTH LEVEL SURFACE FOR PLACEMENT OF TAPERED EDGE. THIS WORK IS SUBSIDIARY TO THE VARIOUS BID ITEMS.


\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS

**CONDITION - 2**  
OVERLAY OF EXISTING PAVEMENT  
HMAC THICKNESS 2.5" TO 5"

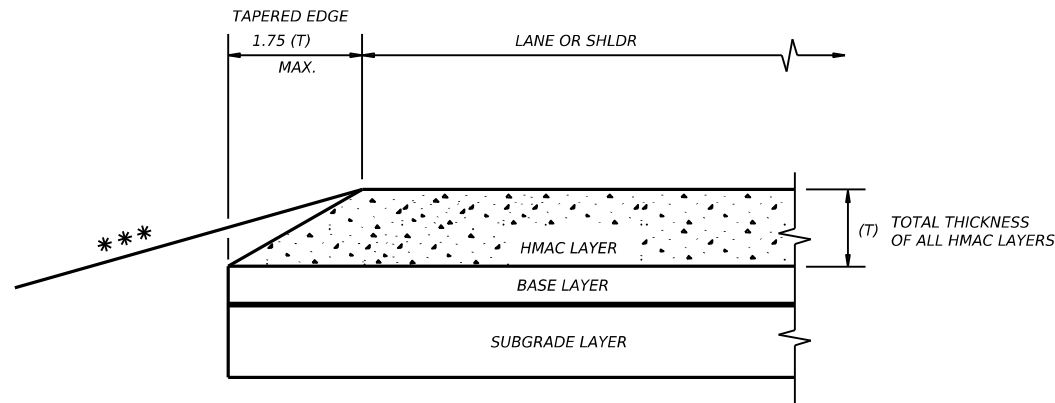

\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS

**CONDITION - 3**  
NEW OR RECONSTRUCTED PAVEMENT  
HMAC THICKNESS 2.5" TO 5"

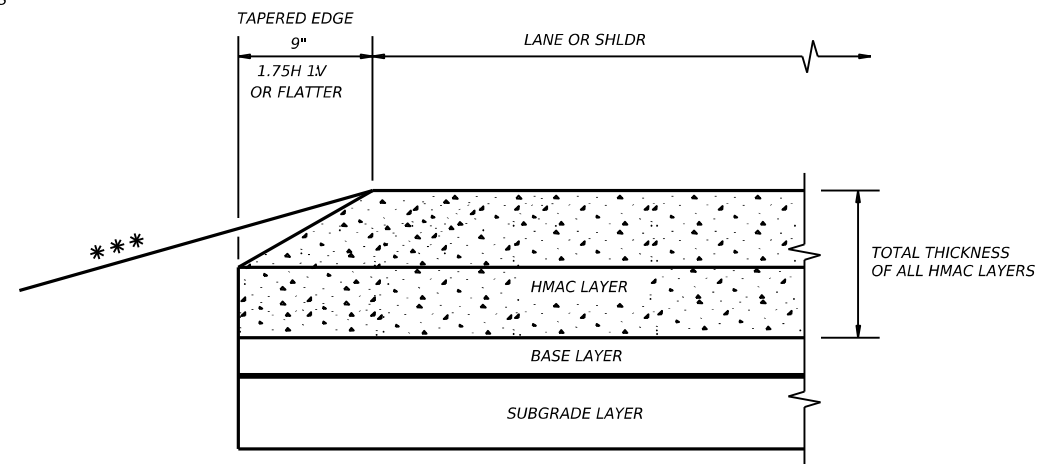

\*\*\* SEE TYPICAL SECTION FOR ROADSIDE DETAILS

**CONDITION - 4**  
NEW OR RECONSTRUCTED PAVEMENT  
HMAC THICKNESS 5" OR GREATER

**GENERAL NOTES**

1. UNLESS OTHERWISE SHOWN IN THE PLANS, A VERTICAL EDGE IS PERMISSIBLE FOR HMAC PLACED GREATER THAN 5" BELOW THE EDGE OF PAVEMENT AND FOR THICKNESS OF HMAC LESS THAN 2.5".
2. FOR FURTHER INFORMATION REGARDING THE ROADSIDE AND PAVEMENT DETAILS, SEE TYPICAL SECTIONS.
3. PAYMENT FOR TAPERED EDGE WILL BE IN ACCORDANCE WITH APPLICABLE ITEMS IN THE CONTRACT.
4. THE SLOPE OF THE TAPERED EDGE SHALL BE 1.75H 1V OR: FLATTER.
5. THE TAPERED EDGE SHALL BE PRODUCED BY USE OF A SCREED ATTACHMENT CAPABLE OF PRODUCING A SMOOTH COMPACTED SURFACE. ADDITIONAL COMPACTING EFFORT BEHIND THE SCREED IS NOT REQUIRED.

(NOT TO SCALE)

					<b>Design Division Standard</b>
<b>TAPERED EDGE DETAILS HMAC PAVEMENT</b>					
<b>TE (HMAC) - 11</b>					
FILE: tehmac11.dgn	DN: TxDOT	CK: RL	DW: KB	CK:	
© TxDOT January 2011	CONT	SECT	JOB	HIGHWAY	
REVISIONS		DIST	COUNTY	SHEET NO.	

DATE:  
FILE: