


DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE TEXAS ENGINEERING PRACTICE ACT. NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.


FLEXIBLE PAVEMENT

CONCRETE PAVEMENT

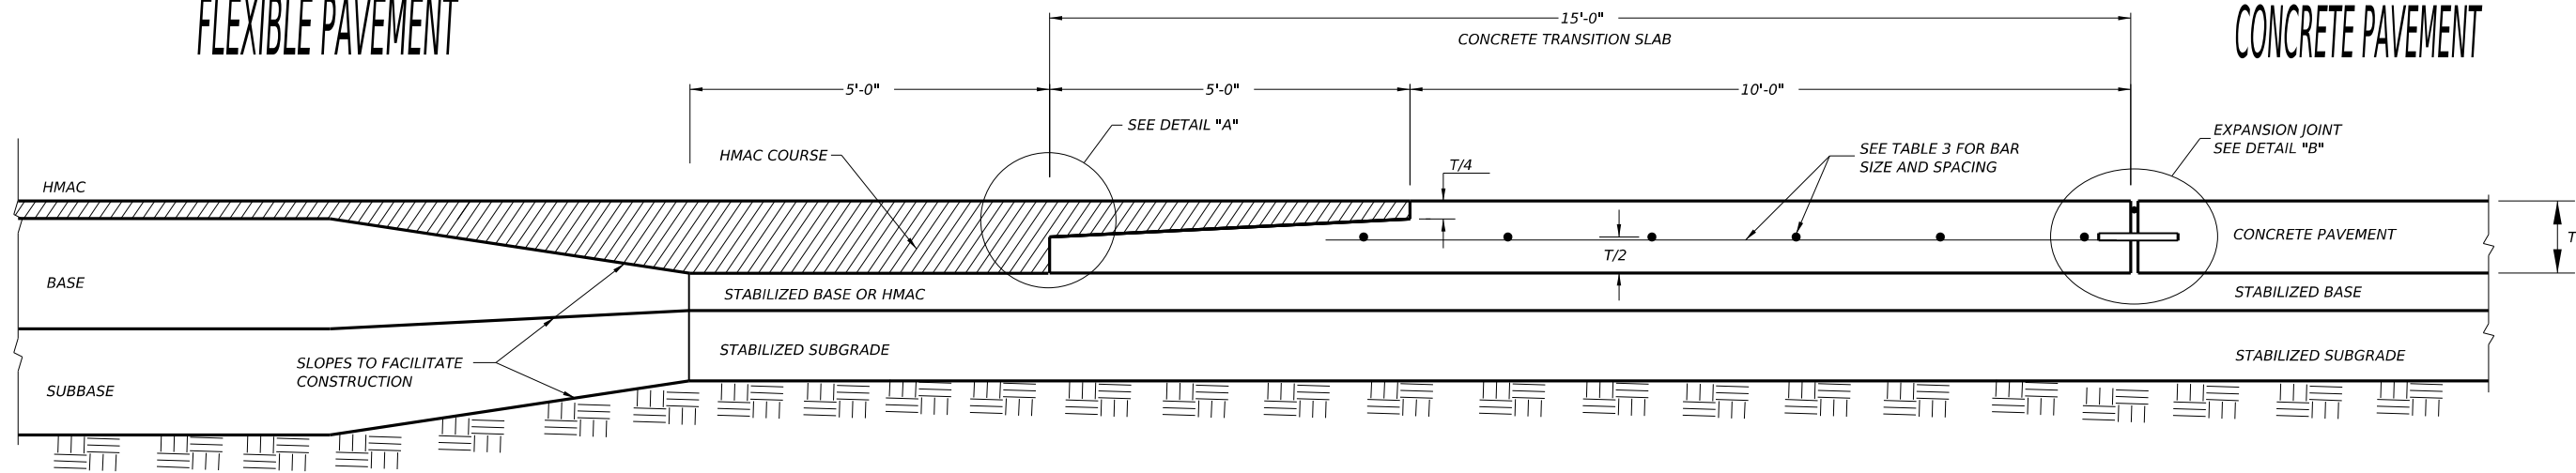


TYPICAL JUNCTION OF CONCRETE PAVEMENT WITH FLEXIBLE PAVEMENT

(NOT TO SCALE)

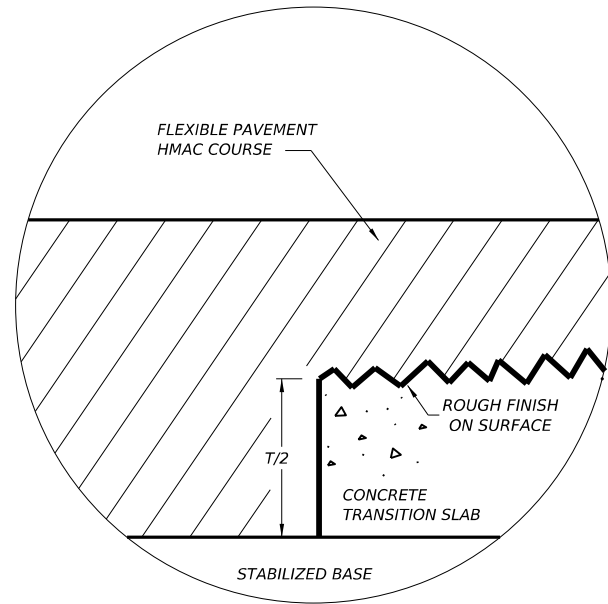

DETAIL "A"

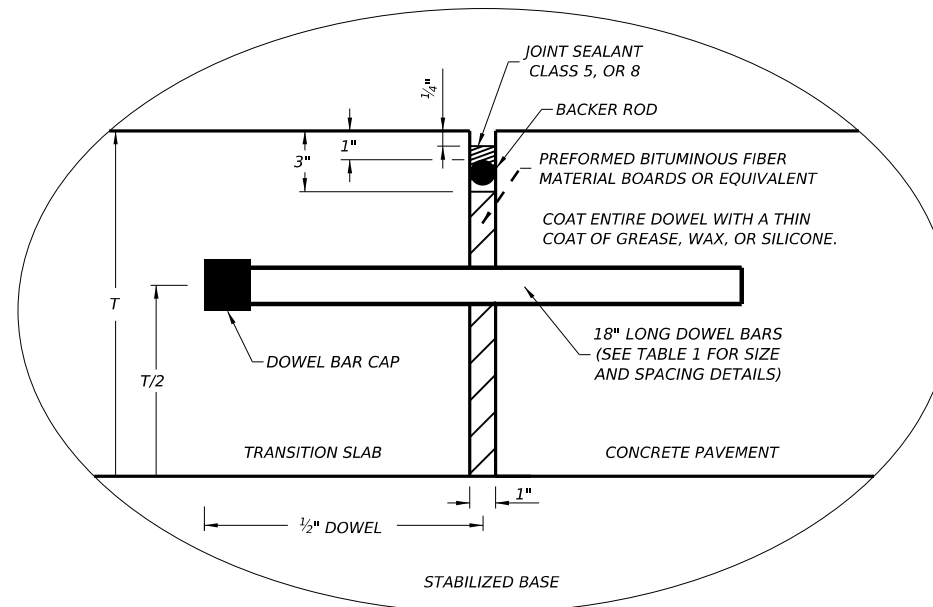

DETAIL "B"

GENERAL NOTES

1. FOR FURTHER INFORMATION REGARDING THE PLACEMENT OF CONCRETE AND LOAD TRANSFER DEVICES REFER TO THE GOVERNING SPECIFICATIONS FOR "CONCRETE PAVEMENT" AND "REINFORCING STEEL."
2. DETAILS FOR PAVEMENT WIDTH AND THE CROWN CROSS-SLOPE SHALL BE SHOWN ELSEWHERE IN THE PLANS.
3. MATCH THE LONGITUDINAL JOINTS OF THE CONCRETE TRANSITION SLAB WITH ADJOINING CONCRETE PAVEMENT. PROVIDE EQUIVALENT TIEBARS OR TRANSVERSE BARS AT THESE LONGITUDINAL JOINTS, SEE TABLE NO. 2.
4. REFER TO DMS-6310, "JOINT SEALANTS AND FILLERS" FOR THE CLASSIFICATIONS.
5. TRANSITION SLABS WILL BE PAID UNDER ITEM 360, "CONCRETE PAVEMENTS."

SLAB THICKNESS T (IN.)	BAR DIA. AND LENGTH	SPACING (IN.)
7 TO 7.5	1" X 18"	12
8 TO 10	1 1/4" X 18"	12
10 TO 13	1 1/2" X 18"	12

SLAB THICKNESS T (IN.)	BAR SIZE	SPACING (IN.)
7 TO 7.5	#5	24
8 TO 13	#6	24

SLAB THICKNESS T (IN.)	BAR SIZE	SPACING (IN.) TRANSVERSE DIRECTION	SPACING (IN.) LONGITUDINAL DIRECTION
7 TO 7.5	#5	24	12
8 TO 13	#6	24	12

ADJUST SPACING OF LONGITUDINAL BARS AS NEEDED TO ACCOMDATE DOWEL BAR SPACING.

Design Division Standard

CONCRETE PAVEMENT DETAILS TRANSITION SLAB T-7 to 13 INCHES

TRANS-20

FILE: transitslab20.dgn	DN: TxDOT	DN: TxDOT	DW: AN	CK: KM
© TxDOT: NOVEMBER 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS				
DIST	COUNTY		SHEET NO.	

DATE:
FILE: