
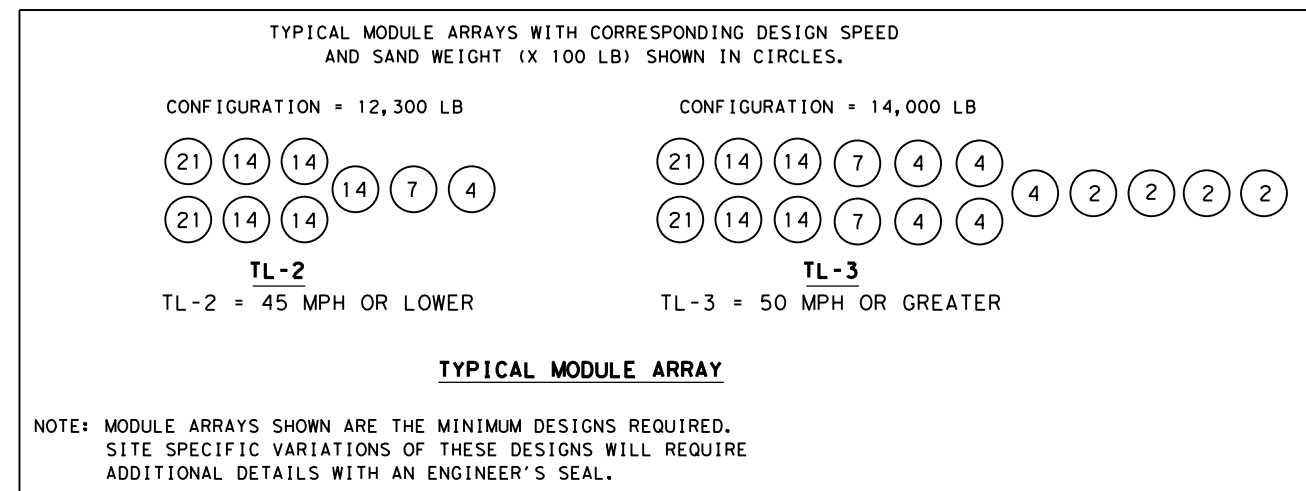
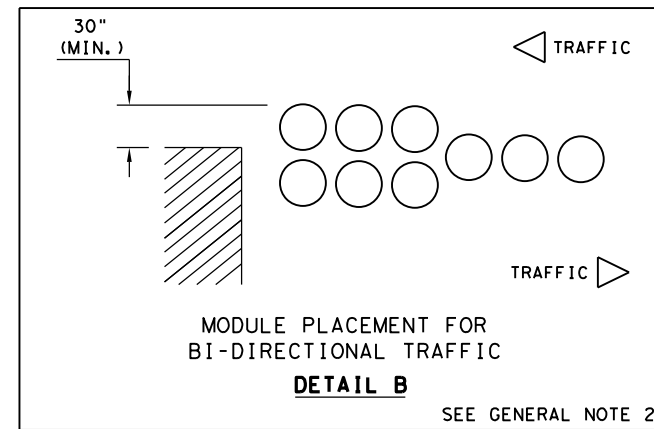


DISCLAIMER: THE USE OF THIS STANDARD IS GOVERNED BY THE "TEXAS ENGINEERING PRACTICE ACT". NO WARRANTY OF ANY KIND IS MADE BY TxDOT FOR ANY PURPOSE WHATSOEVER. TxDOT ASSUMES NO RESPONSIBILITY FOR THE CONVERSION OF THIS STANDARD TO OTHER FORMATS OR FOR INCORRECT RESULTS OR DAMAGES RESULTING FROM ITS USE.

DATE:
 FILE:

SITE CONDITIONS AND PLACEMENT GUIDELINES		
CONDITION	RECOMMENDATION	ILLUSTRATION
1. ANGLE OF ARRAY IN RELATION TO CENTER LINE OF OBSTACLE	NOT RECOMMENDED FOR MORE THAN 10°	
2. MODULE SPACING: MODULE TO FIXED OBJECT MODULE TO MODULE	12" TO 24" SEE DIAGRAM	
3. BI-DIRECTIONAL TRAFFIC	OFFSET ARRAY TO AVOID REAR CORNER MODULE SNAGGING, POTENTIAL BY TRAFFIC IN THE UPSTREAM DIRECTION OF FLOW.	SEE (DETAIL B) SHOWING BI-DIRECTIONAL TRAFFIC
4. "COFFIN" CORNER	SHIELD 30" MINIMUM OUTSIDE OF FIXED OBJECT	
5. SLOPING SITES: LATERAL AND LONGITUDINAL FOR MORE INFORMATION READ GENERAL NOTE: 7	1:10 MAXIMUM (V: H:)	
6. CURB: RAISED ISLAND:	NO MORE THAN 4" HIGH (REMOVE IF POSSIBLE)	
7. FOUNDATION PADS:	FLAT SURFACE: CONCRETE OR ASPHALT	
8. MAINTENANCE:	KEEP SITE CLEAR OF TRASH, ROAD DEBRIS, ETC	
9. SAND DENSITIES	100 LBS / CF	
10. VANDALISM	CHECK PERIODICALLY FOR DAMAGES, GRAFFITI.	

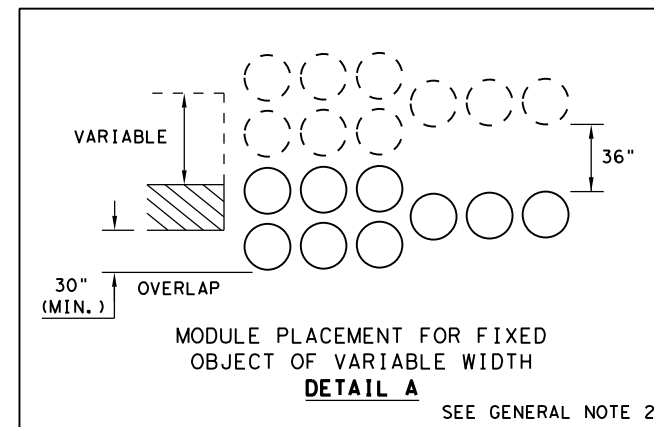

GENERAL NOTES

1. FOR SPECIFIC INFORMATION REGARDING INSTALLATION AND TECHNICAL GUIDANCE OF THE AVAILABLE MASH COMPLIANT SYSTEMS, CONTACT: Traffix DEVICES, INC. AT (949) 361-5663 OR PSS INNOVATIONS, INC. AT (800) 662-6338.
2. REAR MODULES SHOULD OVERLAP THE HAZARDOUS FIXED OBJECT IN WIDTH ON EACH SIDE BY A MINIMUM OF 30 INCHES. SEE DETAILS A, B.
3. BARRIERS CAN BE INSTALLED AT ANY DISTANCE FROM THE SHOULDER, AT ROADSIDE AND MEDIAN LOCATIONS FROM ZERO FT UP TO 30 FT, DEPENDING UPON THE LOCATION OF THE HAZARDOUS FIXED OBJECT.
4. ANGLING THE BARRIER TOWARDS ON-COMING TRAFFIC IS SUGGESTED, 3-DEGREES UP TO 10-DEGREES DEPENDING ON SPACE AVAILABLE.
5. WHENEVER POSSIBLE, CURBS 4 INCHES AND HIGHER SHOULD BE REMOVED FROM THE HAZARDOUS SITES. HOWEVER, WHEN REMOVAL IS NOT POSSIBLE, MODULES CAN BE SEPARATED ALONG THE BARRIER AXIS TO FIT THE SITUATION.
6. LONGITUDINAL SPACING OF MODULES MAY BE INCREASED WHERE SPACE PERMITS, E.G., 2 FT UP TO 3 FT SPACING OF SELECTED MODULES MAY PERMIT THE DESIGNER TO USE ALL THE SPACE ALLOCATED FOR AN ENERGY-ABSORBING BARRIER.
7. THE ENTIRE AREA OF THE CRASH CUSHION INSTALLATION AND APPROACHES SHALL BE GRADED SO THAT THE MAXIMUM SLOPE DOES NOT EXCEED 1V:10H VERTICALLY OR HORIZONTALLY IN ANY DIRECTION.
8. WHERE REQUIRED, SUPPORT PADS, CONCRETE, ASPHALT, ETC, WILL BE MEASURED AND PAID FOR IN ACCORDANCE WITH PERTINENT BID ITEMS.
9. Traffix DEVICES AND PSS INNOVATIONS SAND BARREL SYSTEMS HAVE BEEN ASSESSED AS MASH COMPLIANT.

SACRIFICIAL

		Design Division Standard	
VEHICLE IMPACT ATTENUATOR SAND FILLED PLASTIC MODULES MASH TL-3 & TL-2 VIA (SFPM) - 19			
FILE: viasfpm19.dgn	DN: TxDOT	CK: KM	DW: VP
© TxDOT: DECEMBER 2019	CONT	SECT	JOB
REVISIONS		DIST	SHEET NO.