


DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


SUMMARY OF LARGE SIGNS

PLAN SHEET NO.	SIGN NO.	SIGN BACK-GROUND COLOR	SIGN TEXT	SIGN DIMENSIONS	PLAQUES, & OTHER ATTACHMENTS		BACKGROUND SUBSTRATE (SQ FT)		TYPE OF MOUNT	"X" DIMENSION			GALVANIZED STRUCTURAL STEEL			DRILLED SHAFT				
					DIRECT APPLY	* ALUMINUM (TYPE A)	GROUND MOUNT (TYPE G)	OVERHEAD (TYPE O)		post 1	post 2	post 3	SIZE	LINEAR FEET post 1	LINEAR FEET post 2	LINEAR FEET post 3	TOTAL WEIGHT LBS.	NON-REINF 12"φ	LINEAR FEET REINFORCED 24"φ	30"φ
14	5	GREEN	EXIT 339 SH 36 DRENHAM	7'6" X 2'0"			15.00													
			1/2 MILE	12'0" X 9'0"	9.00		106.00	320	1.5	2.0		W6X12	17.5	16.0		506.6		12		
14	6	BLUE	HOSPITAL EXIT 339	10'6" X 4'6"			47.25													
								320	2.0	2.0		64X7.7	13.5	13.5		276.3	10			
14	7	GREEN	EXIT 339 SH 36 DRENHAM	7'6" X 2'0"			15.00													
			↗	12'0" X 10'0"	9.00		120.00	320	3.5	4.5		W6X12	16.5	20.0		542.6		12		
14	8	GREEN	339 EXIT ↗	5'0" X 2'0"			10.00													
				6'0" X 5'0"			30.00	320	1.5	1.5		63X5.7	13.5	13.5		211.7	7			
15	9	BROWN	EXIT 344 SAN FELIPE STATE PARK	7'6" X 2'0"			15.00													
			2 MILES	15'0" X 8'0"			120.00	320	1.8	0.8		W6X12	16.8	15.8		471.8		12		
29	13	GREEN	EAST NORTH IH 10 US 87 SAN ANTONIO WACO	16'6" X 13'6"			222.75													
			EXIT 1 1/4 MILES		16.56			320	0.5	0.5		W8X18	21.0	21.0		799.6		24		
113	22	GREEN	Ⓞ IH 10 EAST EL PASO VAN HORN	13'0" X 9'6"		9.00														
					9.41		123.50													
113	23	GREEN	Ⓞ EXIT 15 LP 266 ORCHARD BLVD.	8'6" X 2'0"		9.00	17.00													
			1 1/2 MILE	17'0" X 9'6"	16.50		161.50													
113	24	GREEN	Ⓞ EXIT 16 FM 1993 MILITARY DR	8'6" X 2'0"		16.00	17.00													
			EXIT ↓ ONLY	15'0" X 10'0"	19.50		150.00													
PAGE TOTALS							36.00	703.00	469.00											
PAGE TOTALS															2610.6	17	60			

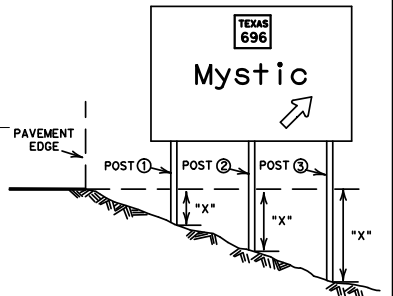

⊙ The "X" dimension is the elevation difference at the post between the ground and the edge of pavement or top of curb.
 Sign supports shall be located as shown on the plans, except that the Engineer may shift the sign supports, within design guidelines, where necessary to secure a more desirable location or to avoid conflict with utilities. Unless otherwise shown on the plans, the Contractor shall stake and the Engineer will verify all sign support locations.
 The post lengths listed here are approximations. The corrected post lengths will be furnished by the Contractor after the stud posts are placed.
 Tower heights shall be verified with the Engineer before fabrication.

* This column is for aluminum Type A and not direct apply. Direct apply is subsidiary to the sign.

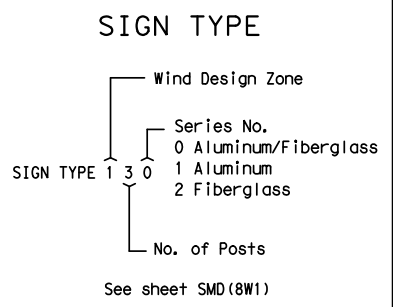

SUMMARY OF
LARGE SIGNS
EXAMPLE