

**SHIPPING PARTS LIST - POLES AND LUMINAIRE ARMS**


Nominal Mounting Ht. (ft)	Shoe Base					T-Base					CSB/SSCB Mounted				
	Designation				Quantity	Designation				Quantity	Designation				Quantity
	Pole	A1	A2	Luminaire		Pole	A1	A2	Luminaire		Pole	A1	A2	Luminaire	
20	(Type SA 20 S - 4)			(150W EQ) LED		(Type SA 20 T - 4)			(150W EQ) LED						
	(Type SA 20 S - 4 - 4)			(150W EQ) LED		(Type SA 20 T - 4 - 4)			(150W EQ) LED						
30	(Type SA 30 S - 4)			(250W EQ) LED		(Type SA 30 T - 4)			(250W EQ) LED			(Type SP 28 S - 4)	(250W EQ) LED		
	(Type SA 30 S - 4 - 4)			(250W EQ) LED		(Type SA 30 T - 4 - 4)			(250W EQ) LED			(Type SP 28 S - 4 - 4)	(250W EQ) LED		
40	(Type SA 30 S - 8)			(250W EQ) LED		(Type SA 30 T - 8)			(250W EQ) LED			(Type SP 28 S - 8)	(250W EQ) LED		
	(Type SA 30 S - 8 - 8)			(250W EQ) LED		(Type SA 30 T - 8 - 8)			(250W EQ) LED			(Type SP 28 S - 8 - 8)	(250W EQ) LED		
	(Type SA 40 S - 4)			(250W EQ) LED		(Type SA 40 T - 4)			(250W EQ) LED			(Type SP 38 S - 4)	(250W EQ) LED		
	(Type SA 40 S - 4 - 4)			(250W EQ) LED		(Type SA 40 T - 4 - 4)			(250W EQ) LED			(Type SP 38 S - 4 - 4)	(250W EQ) LED		
	(Type SA 40 S - 8)			(250W EQ) LED		(Type SA 40 T - 8)			(250W EQ) LED			(Type SP 38 S - 8)	(250W EQ) LED		
	(Type SA 40 S - 8 - 8)			(250W EQ) LED		(Type SA 40 T - 8 - 8)			(250W EQ) LED			(Type SP 38 S - 8 - 8)	(250W EQ) LED		
	(Type SA 40 S - 10)			(250W EQ) LED		(Type SA 40 T - 10)			(250W EQ) LED			(Type SP 38 S - 10)	(250W EQ) LED		
	(Type SA 40 S - 10 - 10)			(250W EQ) LED		(Type SA 40 T - 10 - 10)			(250W EQ) LED			(Type SP 38 S - 10 - 10)	(250W EQ) LED		
	(Type SA 40 S - 12)			(250W EQ) LED		(Type SA 40 T - 12)			(250W EQ) LED			(Type SP 38 S - 12)	(250W EQ) LED		
	(Type SA 40 S - 12 - 12)			(250W EQ) LED		(Type SA 40 T - 12 - 12)			(250W EQ) LED			(Type SP 38 S - 12 - 12)	(250W EQ) LED		
	50	(Type SA 50 S - 4)			(400W EQ) LED		(Type SA 50 T - 4)			(400W EQ) LED			(Type SP 48 S - 4)	(400W EQ) LED	
		(Type SA 50 S - 4 - 4)			(400W EQ) LED		(Type SA 50 T - 4 - 4)			(400W EQ) LED			(Type SP 48 S - 4 - 4)	(400W EQ) LED	
(Type SA 50 S - 8)				(400W EQ) LED		(Type SA 50 T - 8)			(400W EQ) LED			(Type SP 48 S - 8)	(400W EQ) LED		
(Type SA 50 S - 8 - 8)				(400W EQ) LED		(Type SA 50 T - 8 - 8)			(400W EQ) LED			(Type SP 48 S - 8 - 8)	(400W EQ) LED		
(Type SA 50 S - 10)				(400W EQ) LED		(Type SA 50 T - 10)			(400W EQ) LED			(Type SP 48 S - 10)	(400W EQ) LED		
(Type SA 50 S - 10 - 10)				(400W EQ) LED		(Type SA 50 T - 10 - 10)			(400W EQ) LED			(Type SP 48 S - 10 - 10)	(400W EQ) LED		
(Type SA 50 S - 12)				(400W EQ) LED		(Type SA 50 T - 12)			(400W EQ) LED			(Type SP 48 S - 12)	(400W EQ) LED		
(Type SA 50 S - 12 - 12)				(400W EQ) LED		(Type SA 50 T - 12 - 12)			(400W EQ) LED			(Type SP 48 S - 12 - 12)	(400W EQ) LED		

OTHER				
Designation				Quantity
Pole	A1	A2	Luminaire	

**GENERAL NOTES:**

- All work, materials and services not shown on the plans which may be necessary for complete and proper construction shall be performed, furnished and installed by the Contractor. Faulty fabrication or poor workmanship in any material, equipment or installation will be considered justification for rejection. Where manufacturers provide warranties or guarantees as a customary trade practice, furnish to the Department such warranties or guarantees.
- The location of poles and fixtures are diagrammatic only and may be shifted by the Engineer to accommodate local conditions. Install or remove poles and luminaires located near overhead electrical lines using established industry and utility safety practices and in accordance with laws governing such work. Consult with the appropriate utility company prior to beginning such work.
- Standard Steel Pole Designs. Steel poles fabricated in accordance with the details and dimensions shown herein, shall be considered standard designs. Submission of shop drawings and design calculations for standard designs is not required.
- Optional Steel Pole Designs. Multi-sided steel poles may be allowed as optional designs, if steel poles are permitted or required, pending approval by the Department as outlined below.
  - Shop Drawings. Optional designs require submission of shop drawings and design calculations bearing the seal of an engineer licensed in the State of Texas, in accordance with Item 441, "Steel Structures." The Department may elect to pre-approve some shop drawings for optionally designed poles. Submission of shop drawings and design calculations is not required for structures fabricated in accordance with the details of shop drawings on the pre-approved list maintained by the TxDOT Traffic Operations Division. Any deviation from the pre-approved shop drawings will require submission of shop drawings of the complete assembly and design calculations as described above.
  - Structural Support Design for Luminaires. Lighting support structures shall be designed for a 25 year design life in accordance with the AASHTO Standard Specifications for Structural Supports for Highway Signs, Luminaires and Traffic Signals, 6th Edition (2013) and Interim Revisions thereto. All poles shall be designed for 110 mph 3-second gust wind speeds. The Gust Factor, G, and Wind Importance Factor, I<sub>w</sub>, shall be applied as per the AASHTO Specifications assuming a 25-year design life. The design wind pressure for hurricane wind velocities greater than 100 mph shall not be less than the design wind pressure using 100 mph with the non-hurricane Wind Importance Factor, I<sub>w</sub>, value. For transformer base poles, fabricator shall include transformer base and connecting hardware in design calculations and shop drawing submittals. All transformer bases shall have been structurally tested to resist the theoretical plastic moment capacity of the pole. Certification of the plastic moment load test and FHWA breakaway requirement test of the model of base being furnished shall be submitted with the shop drawings. Shop drawings shall show breakaway base model number, and manufacturer's name and logo. Manufacturer's shop drawings shall include the ASTM designations for all materials to be used.
  - Mast Arm Attachments. All poles and attachments shall be structurally designed to support two 12-foot mast arms and luminaires. Poles shall be supplied with mast arm combinations as shown in the plans. All mast arms shall be designed for a 60-pound luminaire having an effective projected area of 1.6 square feet.
  - Anchor Bolt Assembly. Anchor bolt assemblies for optionally designed poles shall be the same as those shown herein.
- Aluminum Pole Designs. Aluminum pole designs may be allowed, if aluminum poles are permitted or required, pending approval by the Department as outlined below.
  - Meet all of the requirements stated above for optional steel pole designs and the following:
    - Aluminum poles shall be fabricated in accordance with "Structural Welding Code-Aluminum" AWS D1.2.
    - Aluminum pole designs shall use the same anchor bolt assembly and be subject to the same geometric restraints and other requirements for steel poles specified herein.
    - Aluminum poles shall be equipped with vibration mitigation devices, as approved by the engineer.
    - Pole components shall be constructed using the following material:  
 Shaft: ASTM B221 or B241 Alloy 6063-T6, ASTM B209 Alloy 5086-H34, ASTM B221 Alloy 6005-T5.  
 Base Flange: ASTM B26 Alloy 356.0-T6 or ASTM B108 Alloy 356.0-T6 (Yield strength test required).  
 Mast Arm Fitting: ASTM B209 Alloy 6061-T6 or ASTM B221 Alloy 6005-T5.  
 Mast Arms: ASTM B241 Alloy 6061-T6 or Alloy 6063-T6.  
 Pole Cap: ASTM B209 Alloy 5086-H32 or ASTM B108 or B26 Alloy 356.0-T6.  
 Bolts: Stainless Steel AISI 300 series. Bolts threading into aluminum threads shall be treated with anti-seize compound, Never-Seez Compound, Permatex 133K or equal.
- Special Designs. Poles with architectural treatments shall meet the requirements shown elsewhere in the plans.
- Luminaire Mounting Height. Actual luminaire mounting height shall be the nominal mounting height given on RIP(2) for all pole-arm combinations except for poles with 4 ft. luminaire arms, which shall be 3'-0" lower than the nominal height, unless otherwise shown or directed.

**EXPLANATION OF ROADWAY ILLUMINATION ASSEMBLY DESIGNATIONS**

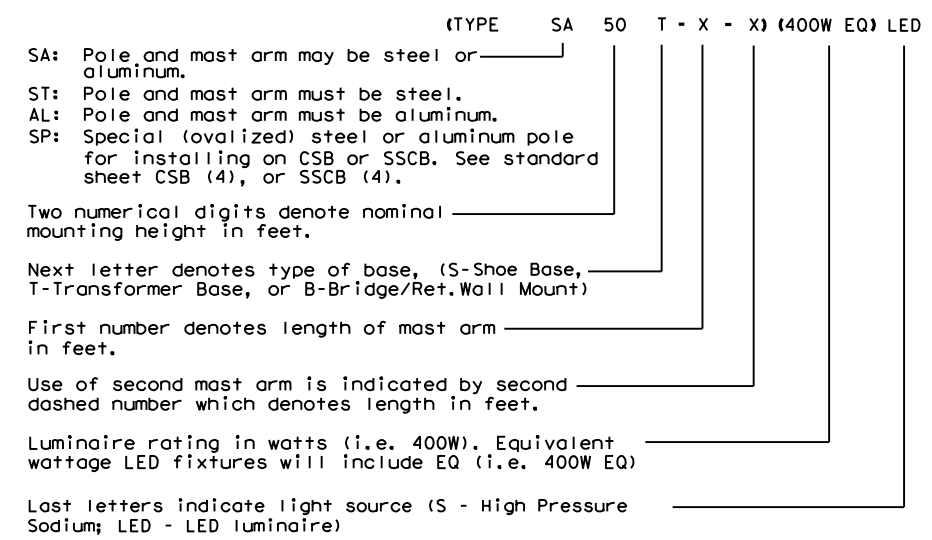

DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

				Traffic Safety Division Standard	
<h2>ROADWAY ILLUMINATION POLES</h2> <h3>RIP(1)-19</h3>					
FILE: rip-19.dgn	DW: _____	CK: _____	DW: _____	CK: _____	
© TxDOT January 2007	CONT	SECT	JOB	HIGHWAY	
REVISIONS					
7-17					
12-19	DIST	COUNTY		SHEET NO.	