DISCLAIMER:
The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.

DATE:
FILE:

STRUCTURE	DESIGNED BEAMS (STRAIGHT STRANDS)																		OPTIONAL DESIGN				
	PRESTRESSING STRANDS									DEBONDED STRAND PATTERN PER ROW								CONCRETE		DESIGN LOAD COMP STRESS (TOP ℄) (SERVICE I)	DESIGN LOAD TENSILE STRESS (BOTT ℄) (SERVICE III)	REQUIRED MINIMUM ULTIMATE MOMENT CAPACITY (STRENGTH I)	LIVE LOAD DISTRIBUTION FACTOR ②	
	SPAN NO.	BEAM NO.	BEAM TYPE	NON-STD STRAND PATTERN	TOTAL NO.	SIZE (in)	STRGTH fpu (ksi)	"e" ℄ (in)	"e" END (in)	TOT. NO. DEB	DIST FROM BOTTOM (in)	NO.OF STRANDS TOTAL	NO.OF STRANDS DE-BONDED	NUMBER OF STRANDS DEBONDED TO (ft from end) 3	6	9	12	15	RELEASE STRGTH ① f'ci (ksi)	MINIMUM 28 DAY COMP STRGTH f'c (ksi)	fct(ksi)	fcb(ksi)	(ft-kips)	Moment	Shear

① Based on the following allowable stresses (ksi):

Compression = 0.65 f'ci

Tension = $0.24\sqrt{f'ci}$

Optional designs must likewise conform.

② Portion of full HL93.

DESIGN NOTES:

Designed in accordance with AASHTO LRFD Bridge Design Specifications.
Prestress losses for the designed beams have been calculated for a relative humidity of ___ percent. Optional designs must likewise conform.

FABRICATION NOTES:

Provide Class H concrete.
Provide Grade 60 reinforcing steel bars.
Use low relaxation strands, each pretensioned to 75 percent of fpu.
When shown on this sheet, the Fabricator has the option of furnishing either the designed beam or an approved optional beam design. All optional design submittals and shop drawings must be signed, sealed and dated by a Professional Engineer registered in the State of Texas.
Locate strands for the designed beam as low as possible on the 2" grid system unless a non-standard strand pattern is indicated. Fill row "2.5", then row "4.5". Place strands within a row as follows:
1) Locate a strand in each "1".
2) Place strand symmetrically about vertical centerline of box.
3) Space strands as equally as possible across the entire width.
Strand debonding must comply with Item 424.4.2.2.2.4.
Do not debond strands in position "1". Distribute debonded strands equally about the vertical centerline. Decrease debonded lengths working inward, with debonding staggered in each row.
Full-length debonded strands are not permitted in positions "1" through "3".

To complete this sheet input the girder designs in the table and the relative humidity under Design Notes. In all cases, remove this block. This sheet must be signed, sealed, and dated by a registered Professional Engineer.

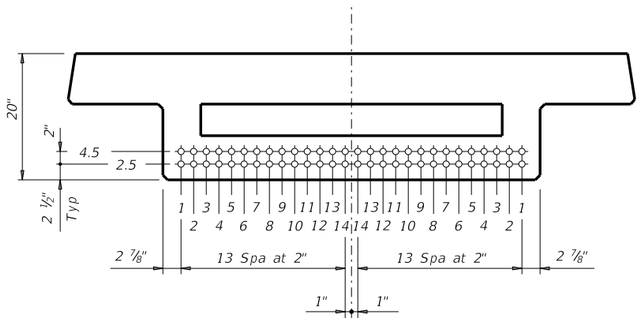

TxDOT DS20 DECKED SLAB BEAM

(Showing interior beam, exterior beam similar.)

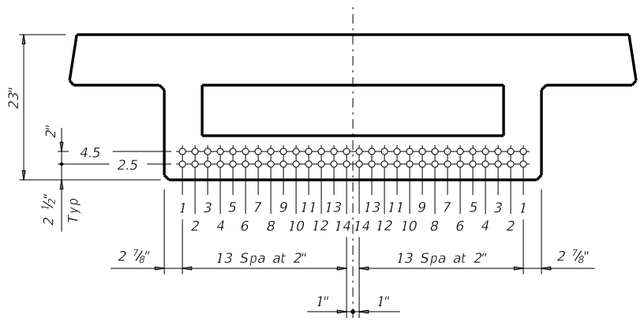

TxDOT DS23 DECKED SLAB BEAM

(Showing interior beam, exterior beam similar.)

HL93 LOADING

Texas Department of Transportation

Bridge Division Standard

PRESTRESSED CONCRETE DECKED SLAB BEAM DESIGNS (NON-STANDARD SPANS)

DSBND

FILE: dsbste03-20.dgn	DN: TxDOT	CK: TxDOT	DW: SFS	CK: SDB
©TxDOT August 2020	CONT	SECT	JOB	HIGHWAY
REVISIONS				
	DIST	COUNTY		SHEET NO.