



DISCLAIMER: The use of this standard is governed by the "Texas Engineering Practice Act". No warranty of any kind is made by TxDOT for any purpose whatsoever. TxDOT assumes no responsibility for the conversion of this standard to other formats or for incorrect results or damages resulting from its use.


DATE:
FILE:

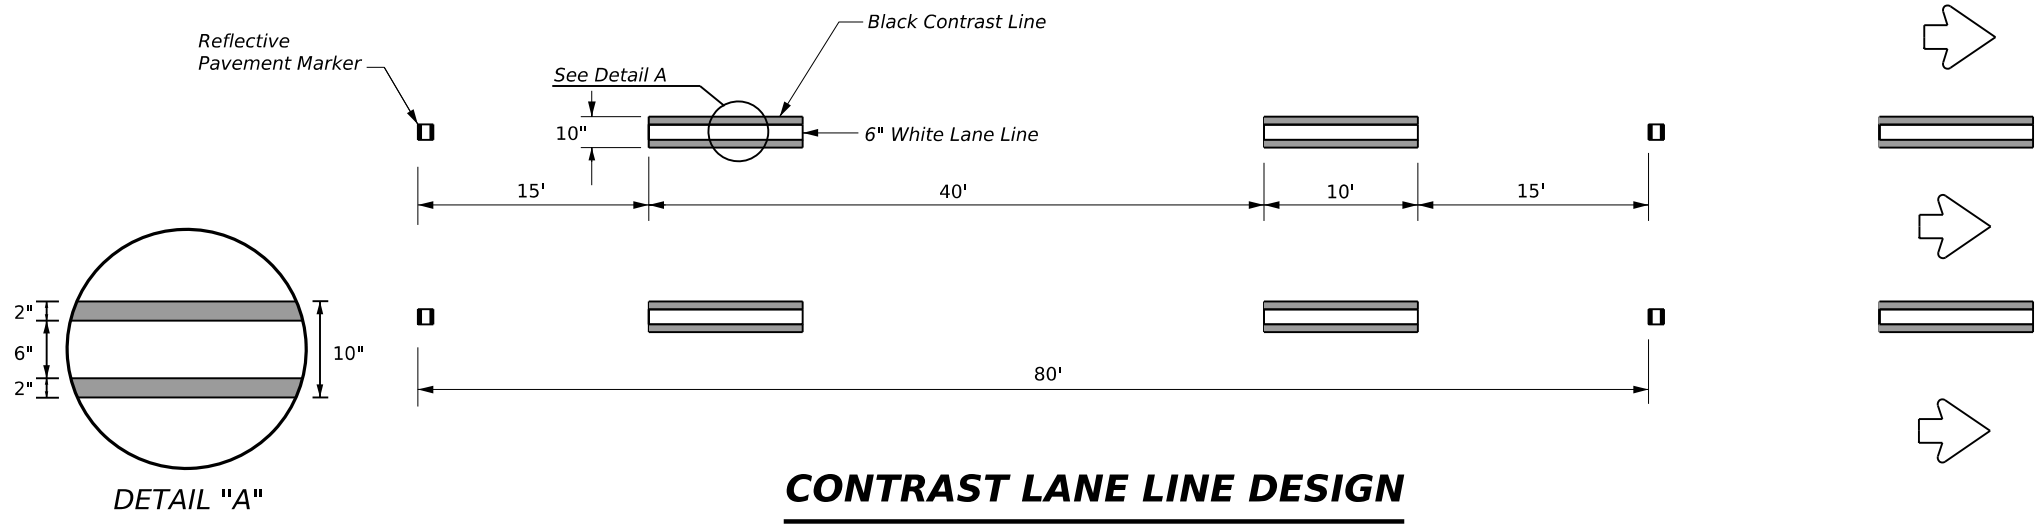

CONTRAST LANE LINE DESIGN



SHADOW LANE LINE DESIGN



CONTRAST CROSSWALK DESIGN

(See PM(4) for crosswalk line placement details)

- GENERAL NOTES**
1. Contrast and Shadow markings may only be used on concrete pavements.
 2. Contrast and Shadow markings shall not be used on edge lines.
 3. Contrast lane lines shall be permanent prefabricated pavement markings meeting DMS 8240.
 4. Shadow lane line designs shall be a liquid markings system approved by TxDOT.
 5. All raised reflective pavement markers placed in broken lines shall be placed in line with and midway between the white stripes.
 6. See PM(2) for raised reflective pavement markings installation details.

MATERIAL SPECIFICATIONS	
PAVEMENT MARKERS (REFLECTORIZED)	DMS-4200
EPOXY AND ADHESIVES	DMS-6100
BITUMINOUS ADHESIVE FOR PAVEMENT MARKERS	DMS-6130
TRAFFIC PAINT	DMS-8200
HOT APPLIED THERMOPLASTIC	DMS-8220
PERMANENT PREFABRICATED PAVEMENT MARKINGS	DMS-8240

All pavement marking materials shall meet the required Departmental Material Specifications as specified by the plans.



CONTRAST AND SHADOW PAVEMENT MARKINGS

CPM(1)-23

FILE: CPM(1)-23.dgn	DN:	CK:	DW:	CK:
© TxDOT February 2023	CONT	SECT	JOB	HIGHWAY
REVISIONS				
5-14	DIST	COUNTY	SHEET NO.	
2-23				